

Data Sheet

G-Series V GP5 Digital Magnetostrictive Linear Position Sensors

- Digital-pulse output models: PWM or Start/Stop
- LED for visualization of the sensor status
- Field adjustments and diagnostics using the TempoLink® smart assistant



MEASURING TECHNOLOGY

The absolute, linear position sensors provided by Tempsonics rely on the company's proprietary magnetostrictive technology, which can determine position with a high level of precision and robustness. Each Tempsonics® position sensor consists of a ferromagnetic waveguide, a position magnet, a strain pulse converter and supporting electronics. The magnet, connected to the object in motion in the application, generates a magnetic field at its location on the waveguide. A short current pulse is applied to the waveguide. This creates a momentary radial magnetic field and torsional strain on the waveguide. The momentary interaction of the magnetic fields releases a torsional strain pulse that propagates the length of the waveguide. When the ultrasonic wave reaches the beginning of the waveguide it is converted into an electrical signal. Since the speed of the ultrasonic wave in the waveguide is precisely known, the time required to receive the return signal can be converted into a linear position measurement with both high accuracy and repeatability.

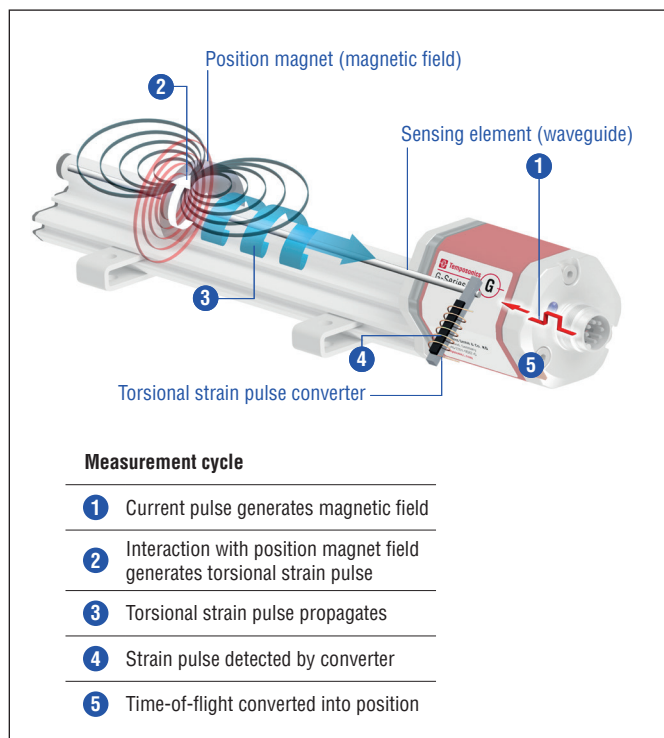


Fig. 1: Time-of-flight based magnetostrictive position sensing principle

G-SERIES V GP5 Digital

The Tempsonics® G-Series V brings balanced sensor performance to meet the many demands of your application. The main advantages of the profile version GP5 with digital output PWM and Start/Stop are:




15 positions simultaneously

The G-Series V Digital can detect and report the position of up to 15 magnets simultaneously (controller dependent).



LED for sensor status

The LED in the housing cover visualizes the sensor status. This allows you to see the current status of the sensor at a glance.



Switching output

You can switch the digital output of the sensor from Start/Stop to Pulse Width Modulation (PWM) and vice versa on site.

All settings under control with the smart assistant for the G-Series V

The TempoLink® smart assistant supports you in setup and diagnostics of the G-Series V. Among other things, you can adjust the parameters of the sensor to your application on site or read out information about the current status of the sensor.

For more information of this assistant please see the data sheet:

- TempoLink® smart assistant
(Document part number: [552070](#))



TECHNICAL DATA

Output						
Digital pulse outputs	Start/Stop and Pulse Width Modulation (PWM)					
Measured output variables	Position					
Measurement parameters						
Null/Span adjustment	100 % of electrical stroke					
Resolution	0.1, 0.01 and 0.005 mm (controller dependent)					
Update time	Stroke length	≤ 500 mm	≤ 1100 mm	≤ 3000 mm	≤ 6250 mm	≤ 6250 mm
	Update time	500 μs	1 ms	2 ms	4 ms	5 ms
Linearity deviation ¹	< ±0.02 % F.S. (minimum ±50 μm)					
Repeatability	< ±0.002% % F.S. (minimum ±5 μm)					
Hysteresis	< 4 μm typical					
Temperature coefficient	< 30 ppm/K typical					
Operating conditions						
Operating temperature	−40...+80 °C (−40...+176 °F)					
Humidity	90 % relative humidity, no condensation					
Ingress protection	IP67 (connectors correctly fitted)/IP68 (3 m/3 d) for cable outlet					
Shock test	100 g/11 ms, IEC standard 60068-2-27					
Vibration test	30 g/10...2000 Hz, IEC standard 60068-2-6 (excluding resonant frequencies)					
EMC test	Electromagnetic emission according to EN 61000-6-3					
	Electromagnetic immunity according to EN 61000-6-2					
	The GP5 sensors fulfill the requirements of the EMC directives 2014/30/EU, UKSI 2016 No. 1091 and					
	TR CU 020/2011					
Magnet movement velocity	Magnet slider: Max. 10 m/s; U-magnet: Any; Block magnet: Any					
Design/Material						
Sensor electronics housing	Aluminum (painted), zinc die cast					
Sensor profile	Aluminum					
RoHS compliance	The used materials are compliant with the requirements of EU Directive 2011/65/EU and EU Regulation 2015/863 as well as UKSI 2022 No. 622 with amendments.					
Stroke length	25...6350 mm (1...250 in.)					
Mechanical mounting						
Mounting position	Any					
Mounting instruction	Please consult the technical drawings on page 4					
Electrical connection						
Connection type	1 × M16 male connectors (6 pin) or cable outlet					
Operating voltage	Standard: +24 VDC (-15/+20 %)/option: +9 VDC...+28.8 VDC; The GP5 sensors must be power supplied via an external Class 2 power source in accordance with the UL approval					
Power consumption	2.5 W typical (3.5 W maximum)					
Dielectric strength	500 VDC (DC ground to machine ground)					
Polarity protection	Up to −30 VDC					
Overvoltage protection	Up to 36 VDC					

1/ With position magnet # 251 416-2

TECHNICAL DRAWING

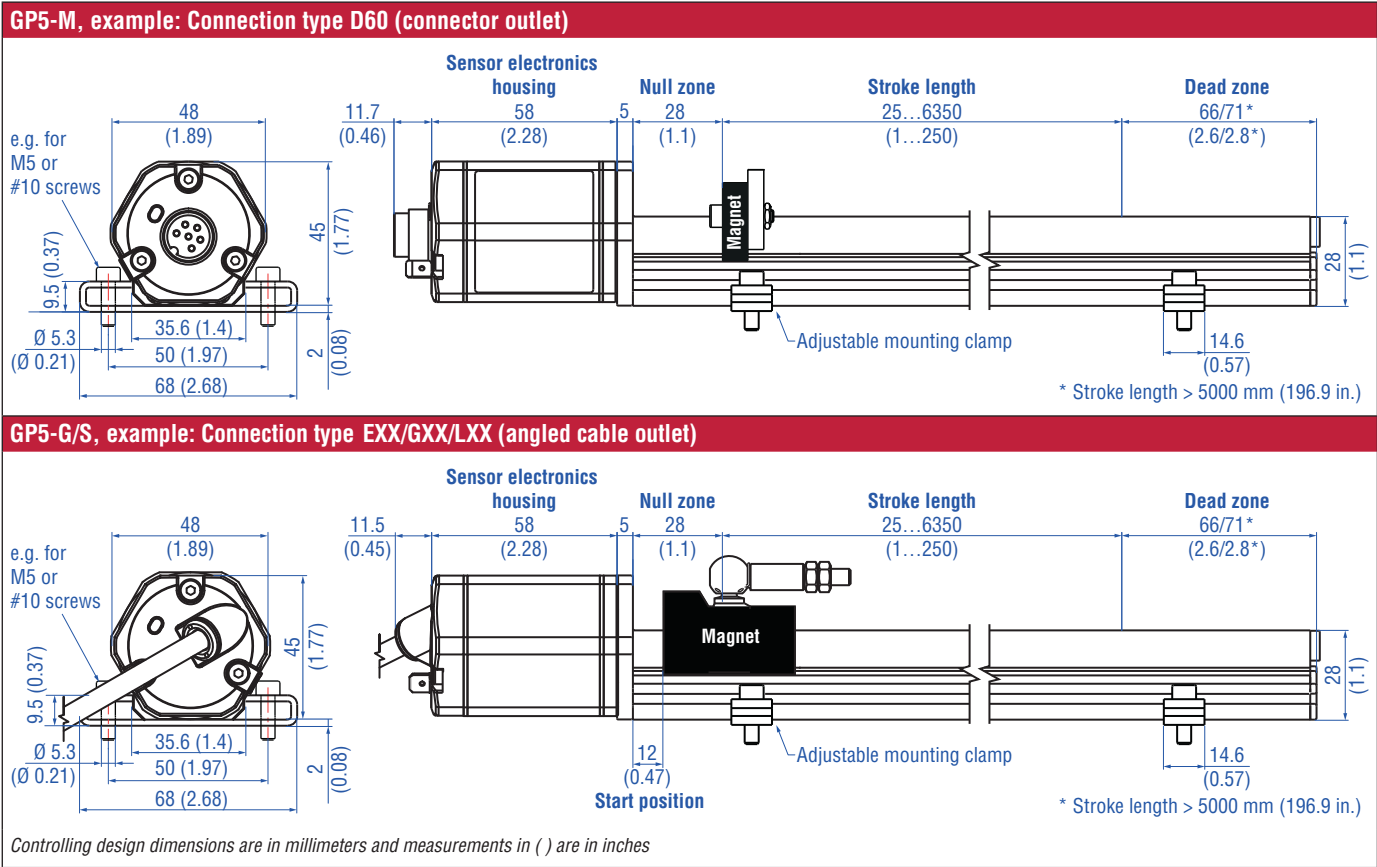


Fig. 2: Temposonics® GP5 with U-magnet/magnet slider

CONNECTOR WIRING


D60		
Signal + power supply		
M16 male connector	Pin	Function
 <p>View on sensor</p>	1	Gate (-) for PWM Stop (-) for Start/Stop
	2	Gate (+) for PWM Stop (+) for Start/Stop
	3	Interrogation (+) for PWM Start (+) for Start/Stop
	4	Interrogation (-) for PWM Start (-) for Start/Stop
	5	+24 VDC (-15/+20 %)
	6	DC Ground (0 V)

Fig. 3: Connector wiring D60


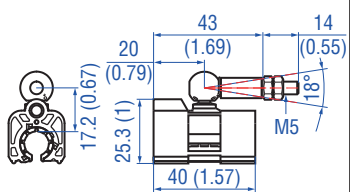


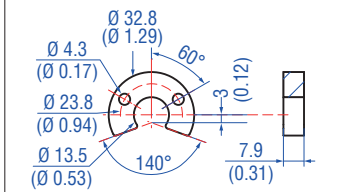
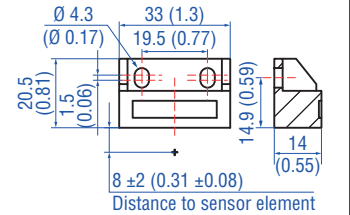


EXX/GXX/LXX		
Signal + power supply		
Cable	Color	Function
	GY	Gate (-) for PWM Stop (-) for Start/Stop
	PK	Gate (+) for PWM Stop (+) for Start/Stop
	YE	Interrogation (+) for PWM Start (+) for Start/Stop
	GN	Interrogation (-) for PWM Start (-) for Start/Stop
	BN	+24 VDC (-15/+20 %)
	WH	DC Ground (0 V)

Fig. 4: Connector wiring for cable outlet





FREQUENTLY ORDERED ACCESSORIES – Additional options available in our [Accessories Catalog](#) 551444

Position magnets			
 <p>Magnet slider S, joint at top Part no. 252 182</p> <p>Material: GRP, magnet hard ferrite Weight: Approx. 35 g Operating temperature: –40...+85 °C (–40...+185 °F)</p>	 <p>Magnet slider V, joint at front Part no. 252 184</p> <p>Material: GRP, magnet hard ferrite Weight: Approx. 35 g Operating temperature: –40...+85 °C (–40...+185 °F)</p>	 <p>Block magnet K Part no. 251 298-2</p> <p>Material: XOLOX Neobond 50L Weight: Approx. 22 g Surface pressure: Max. 20 N/mm² Fastening torque for M4 screws: 1 Nm Operating temperature: –40...+105 °C (–40...+221 °F)</p> <p>This magnet may influence the sensor performance specifications for some applications.</p>	 <p>U-magnet OD33 Part no. 251 416-2</p> <p>Material: PA ferrite GF20 Weight: Approx. 11 g Surface pressure: Max. 40 N/mm² Fastening torque for M4 screws: 1 Nm Operating temperature: –40...+120 °C (–40...+248 °F)</p>
Position magnets		Mounting accessories	
 <p>Block magnet L Part no. 403 448</p> <p>Material: Plastic carrier with neodymium magnet Weight: Approx. 20 g Fastening torque for M4 screws: 1 Nm Operating temperature: –40...+75 °C (–40...+167 °F)</p> <p>This magnet may influence the sensor performance specifications for some applications.</p>	 <p>Mounting clamp Part no. 400 802</p> <p>Material: Stainless steel (AISI 304)</p>	 <p>T-nut Part no. 401 602</p> <p>Fastening torque for M5 screw: 4.5 Nm</p>	

Controlling design dimensions are in millimeters and measurements in () are in inches

Cable connectors*

Cables

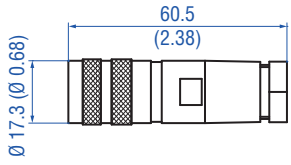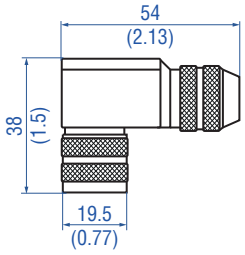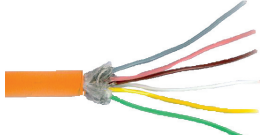			
M16 female connector (6 pin), straight Part no. 370 423	M16 female connector (6 pin), angled Part no. 370 460	PVC cable Part no. 530 032	PUR cable Part no. 530 052
<p>Material: Zinc nickel plated Termination: Solder Cable Ø: 6...8 mm (0.24...0.31 in.) Operating temperature: -40...+100 °C (-40...+212 °F) Ingress protection: IP65/IP67 (correctly fitted) Fastening torque: 0.6 Nm</p>	<p>Material: Zinc nickel plated Termination: Solder Cable Ø: 6...8 mm (0.24...0.31 in.) Wire: 0.75 mm² (20 AWG) Operating temperature: -40...+95 °C (-40...+203 °F) Ingress protection: IP67 (correctly fitted) Fastening torque: 0.6 Nm</p>	<p>Material: PVC jacket; gray Features: Twisted pair, shielded, flexible Cable Ø: 6 mm (0.23 in.) Cross section: 3 × 2 × 0.14 mm² Bending radius: 10 × D (fixed installation) Operating temperature: -40...+105 °C (-40...+221 °F)</p>	<p>Material: PUR jacket; orange Features: Twisted pair, shielded, highly flexible, halogen free, suitable for drag chains, mostly oil & flame resistant Cable Ø: 6.4 mm (0.25 in.) Cross section: 3 × 2 × 0.25 mm² Bending radius: 5 × D (fixed installation) Operating temperature: -20...+80 °C (-4...+176 °F)</p>




Cable



FEP cable Part no. 530 157

Material: FEP jacket; black
Features: Twisted pair, shielded
Cable Ø: 6.7 mm (0.26 in.)
Cross section: 3 × 2 × 0.14 mm²
Operating temperature: -40...+180 °C (-40...+356 °F)

* / Follow the manufacturer's mounting instructions
Color of connectors and cable jacket may change. Color codes for the individual wires and technical properties remain unchanged.
Controlling design dimensions are in millimeters and measurements in () are in inches

Extension cables M16			Notice for extension cables M16																													
			<table><tr><th colspan="3">Standard cable lengths</th></tr><tr><th>Meters</th><th>Feet</th><th>Code</th></tr><tr><td>1.5</td><td>5.0</td><td>0150</td></tr><tr><td>2.0</td><td>6.6</td><td>0200</td></tr><tr><td>4.6</td><td>15.0</td><td>0460</td></tr><tr><td>5.0</td><td>16.4</td><td>0500</td></tr><tr><td>7.6</td><td>25.0</td><td>0760</td></tr><tr><td>10.0</td><td>32.8</td><td>1000</td></tr><tr><td>15.2</td><td>50.0</td><td>1520</td></tr></table>			Standard cable lengths			Meters	Feet	Code	1.5	5.0	0150	2.0	6.6	0200	4.6	15.0	0460	5.0	16.4	0500	7.6	25.0	0760	10.0	32.8	1000	15.2	50.0	1520
Standard cable lengths																																
Meters	Feet	Code																														
1.5	5.0	0150																														
2.0	6.6	0200																														
4.6	15.0	0460																														
5.0	16.4	0500																														
7.6	25.0	0760																														
10.0	32.8	1000																														
15.2	50.0	1520																														
PVC cable with M16 female connector (6 pin), straight – pigtail PVC cable (part no. 530 032) with M16 female connector, straight (part no. 370 423) Order code: K2-A-370423-xxxxyy-530032-0 (where xxxx = cable length and yy = unit in centimeters “CM” or feet “FT”)	PUR cable with M16 female connector (6 pin), straight – pigtail PUR cable (part no. 530 052) with M16 female connector, straight (part no. 370 423) Order code: K2-A-370423-xxxxyy-530052-0 (where xxxx = cable length and yy = unit in centimeters “CM” or feet “FT”)	FEP cable with M16 female connector (6 pin), straight – pigtail FEP cable (part no. 530 112) with M16 female connector, straight (part no. 370 423) Order code: K2-A-370423-xxxxyy-530112-0 (where xxxx = cable length and yy = unit in centimeters “CM” or feet “FT”)	For additional extension cables reference the accessories catalog for industrial sensors (document part no.: 551444).																													
Programming tools																																

Programming tools



TempoLink® kit for Temposonics® G-Series V
 Part no. TL-1-0-AD60
 Part no. TL-1-0-AS00

- Connect wirelessly via Wi-Fi enabled device or via USB with the diagnostic tool
- Simple connectivity to the sensor via 24 VDC power line (permissible cable length: 30 m)
- User friendly interface for mobile devices and desktop computers
- See data sheet “TempoLink® smart assistant” (document part no.: [552070](#)) for further information

Color of connectors and cable jacket may change. Color codes for the individual wires and technical properties remain unchanged.
 Controlling design dimensions are in millimeters and measurements in () are in inches

ORDER CODE

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19
G	P	5																
a	b	c	d	e	f	g	h											

19 optional

a	Sensor model
G P 5	Profile

b	Design
K	Block magnet K (part no. 251 298-2)
L	Block magnet L (part no. 403 448)
M	U-magnet OD33 (part no. 251 416-2)
O	No position magnet
S	Magnet slider joint at top (part no. 252 182)
V	Magnet slider joint at front (part no. 252 184)

c	Mechanical options
A	Standard
V	Fluorelastomer seals for the sensor electronics housing

d	Stroke length
X X X X M	0025...6350 mm
Standard stroke length (mm) Ordering steps	
25... 500 mm	25 mm
500...2500 mm	50 mm
2500...5000 mm	100 mm
5000...6350 mm	250 mm
X X X X U	001.0...250.0 in.
Standard stroke length (in.) Ordering steps	
1... 20 in.	1.0 in.
20...100 in.	2.0 in.
100...200 in.	4.0 in.
200...250 in.	10.0 in.
Non-standard stroke lengths are available; must be encoded in 5 mm/0.1 in. increments.	

e	Number of magnets
X X	01...15 Positions (1...15 magnets) (multi-position measurement* only for outputs »R0« & »RF«)

f	Connection type
Connector	
D 6 0	M16 male connector (6 pin)
Angled cable outlet	
E X X	XX m/ft. PVC cable (part no. 530 032) E01...E30 (1...30 m)/E03...E99 (3...99 ft.) See "Frequently ordered accessories" for cable specifications
G X X	XX m/ft. FEP cable (part no. 530 157) G01...G30 (1...30 m)/G03...G99 (3...99 ft.) See "Frequently ordered accessories" for cable specifications
L X X	XX m/ft. PUR cable (part no. 530 052) L01...L30 (1...30 m)/L03...L99 (3...99 ft.) See "Frequently ordered accessories" for cable specifications
Encode in meters if using metric stroke length. Encode in feet if using US customary stroke length.	

g	System
1	Standard
2	Operating voltage: +9...+28.8 VDC

h See next page

*Number of magnets ≥ 2 magnets

h	Output
R O	Start/Stop
R F	Start/Stop with closed error signal utility
D I X	PWM, internal interrogation X denotes the number of circulations (see table 1)
F I X	PWM, internal interrogation with closed error signal utility X denotes the number of circulations (see table 1)
D E X	PWM, external interrogation X denotes the number of circulations (see table 1)
F E X	PWM, external interrogation and closed error signal utility X denotes the number of circulations (see table 1)

»X« for output »DIX«, »FIX«, »DEX« and »FEX«										
Number of circulations	1	2	3	4	5	6	7	8	9	10
»X« in order code	1	2	3	4	5	6	7	8	9	A
Number of circulations	11	12	13	14	15	16	17	18	19	20
»X« in order code	B	C	D	E	F	G	H	I	J	K

Table 1: Number of circulations

NOTICE

- For GP5, the magnet selected in **b** "Design" is included in the scope of delivery. Specify the number of magnets for your application. For multi-position measurements with more than 1 magnet order the other magnets separately.
- The number of magnets is limited by the stroke length.
- The minimum allowed distance between magnets (i.e. of one to the front face of the next one) is 75 mm (3 in.).
- Use magnets of the same type for multi-position measurement.

DELIVERY



- Sensor
 - Position magnet (not valid for GP5 with design »O«)
 - 2 mounting clamps up to 1250 mm (50 in.) stroke length
- Accessories have to be ordered separately.

Manuals, Software & 3D Models available at:
www.temposonics.com

GLOSSARY

C

Closed Error Signal Utility

At very high shock or vibration events, the magnet may no longer be detected properly. For these error events the closed error signal utility will produce an output signal waveform that corresponds to a value of just over the 100 % full stroke position. Therefore, the Closed Error Signal Utility should only be used with certain Allen Bradley and Digitron Electronics interface cards that are designed to process this sensor output appropriately. Contact Applications Engineering for more information.

E

External Interrogation

For a sensor that is configured for external interrogation, a signal is required from the controller or interface module to initiate every measurement cycle.

I

Internal Interrogation

For a sensor that is configured for internal interrogation, no signal is needed from the controller as the sensor itself initiates the next measurement cycle upon the completion of the current cycle.



Temposonics

AN AMPHENOL COMPANY

UNITED STATES
Temposonics, LLC
Americas & APAC Region
3001 Sheldon Drive
Cary, N.C. 27513
Phone: +1 919 677-0100
E-mail: info.us@temposonics.com

GERMANY
Temposonics
GmbH & Co. KG
EMEA Region & India
Auf dem Schüffel 9
58513 Lüdenscheid
Phone: +49 2351 9587-0
E-mail: info.de@temposonics.com

ITALY
Branch Office
Phone: +39 030 988 3819
E-mail: info.it@temposonics.com

FRANCE
Branch Office
Phone: +33 6 14 060 728
E-mail: info.fr@temposonics.com

UK
Branch Office
Phone: +44 79 21 83 05 86
E-mail: info.uk@temposonics.com

SCANDINAVIA
Branch Office
Phone: +46 70 29 91 281
E-mail: info.sca@temposonics.com

CHINA
Branch Office
Phone: +86 21 3405 7850
E-mail: info.cn@temposonics.com

JAPAN
Branch Office
Phone: +81 3 6416 1063
E-mail: info.jp@temposonics.com

Document Part Number:
552224 Revision A (EN) 06/2025



temposonics.com

© 2025 Temposonics, LLC – all rights reserved. Temposonics, LLC and Temposonics GmbH & Co. KG are subsidiaries of Amphenol Corporation. Except for any third party marks for which attribution is provided herein, the company names and product names used in this document may be the registered trademarks or unregistered trademarks of Temposonics, LLC or Temposonics GmbH & Co. KG. Detailed trademark ownership information is available at www.temposonics.com/trademarkownership.