

Table of contents

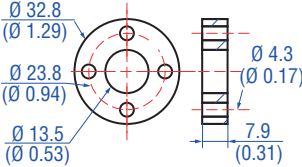
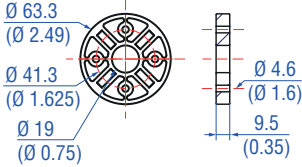
1. Position magnets	3
1.1 Ring magnets	3
1.2 U-magnets	6
1.3 Magnet sliders	7
1.4 Block magnets	9
1.5 Floats	9
2. O-rings	13
3. Back-up rings	14
4. Mounting accessories	15
4.1 General accessories	15
4.2 Sensor rod HD/HL/HP for R-Series V RFV & RF5	18
4.3 Sensor rod H3 for R-Series V RFV & RF5	20
4.4 Profile HFP for R-Series V RFV & RF5	22
5. Connectors	24
5.1 Overview	24
5.2 M8 connector	26
5.3 M12 connectors	26
5.4 M16 connectors	29
5.5 Connection accessories	30
6. Cables	32
6.1 Pigtailed cables	32
6.2 Cable sets	36
7. Cable configurator	42
7.1 Structure	42
7.2 Analog	43
7.3 CANbus	44
7.4 EtherCAT®/EtherNet/IP™/POWERLINK/PROFINET	45
7.5 PROFIBUS	46
7.6 Start/Stop	47
7.7 SSI	48
7.8 Power supply for CANbus/EtherCAT®/EtherNet/IP™/POWERLINK/PROFIBUS/PROFINET	49
8. Programming tools	50
9. TempoLink® smart assistant for R-Series V and G-Series V	54
9.1 Adapter cables for connection of TempoLink® smart assistant to an R-Series V or a G-Series V sensor	55
9.2 Inline cables for SSI output	56
10. TempoGate® smart assistant for R-Series V	57
10.1 Connection moduls	58
10.2 Recovery medium	58

Introduction

This brochure provides an overview of accessories for our industrial sensors. It supplements the specifications in the data sheets and operation manuals of the individual sensors. For each accessory, it is specified for which sensor it is suitable and which one has been used most. So you can quickly and easily find the right accessories for your Temposonics sensor. In order to simplify the search, the items are sorted in ascending order according to their part number.

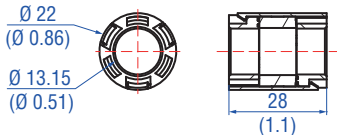
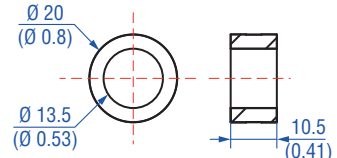
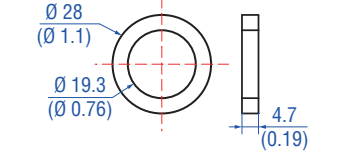
1. Position magnets

1.1 Ring magnets

Drawing	Name & part number	Description	Series & design
	Ring magnet OD33 Part no. 201 542-2	Material: PA ferrite GF20 Weight: Approx. 14 g Surface pressure: Max. 40 N/mm ² Fastening torque for M4 screws: 1 Nm Operating temperature: -40...+120 °C (-40...+248 °F) Marked version for sensors with internal linearization: Part no. 253 620	E-Series EH, EE, ET (rod) G-Series V/G-Series GH5, GT, GTE GB-Series GB R-Series RH, RD4, RT4 R-Series V RH5, RM5, RDV, RF5, RD5 T-Series TH
	Ring magnet OD63.5 Part no. 201 554	Material: PA 66-GF30, magnet slugs potted Weight: Approx. 35 g Surface pressure: Max. 20 N/mm ² Fastening torque for M4 screws: 1 Nm Operating temperature: -40...+75 °C (-40...+167 °F)	E-Series EH, EE, ET (rod) G-Series V/G-Series GH5, GT, GTE GB-Series GB R-Series RH, RD4, RT4, RF R-Series V RH5, RM5, RDV, RFV, RF5, RD5 T-Series TH

Recommended accessories are marked with the following sign: 

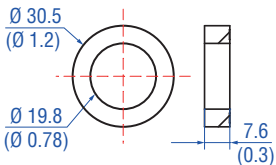
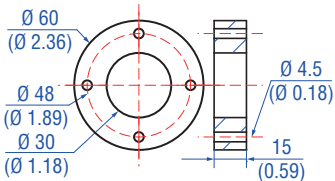
Controlling design dimensions are in millimeters and measurements in () are in inches

Drawing	Name & part number	Description	Series & design
	System magnet Part no. 253 928	Material: Composite POM Weight: Approx. 14 g Surface pressure: Max. 20 N/mm ² Operating temperature: -40...+100 °C (-40...+212 °F)	E-Series EH, EE, ET (rod) G-Series V/G-Series GH5, GT, GTE GB-Series GB R-Series RH, RD4, RT4 R-Series V RH5, RM5, RDV, RD5 T-Series TH
	Ring magnet OD20 Part no. 254 012	Material: Composite neobond Weight: Approx. 8.5 g Surface pressure: Max. 20 N/mm ² Operating temperature: -40...+75 °C (-40...+167 °F)	E-Series EH, EE, ET (rod) G-Series V/G-Series GH5, GT, GTE GB-Series GB R-Series RH, RD4, RT4 R-Series V RH5, RM5, RDV, RD5 T-Series TH
	Ring magnet OD28 Part no. 400 424	Material: Composite PA ferrite GF20 Weight: Approx. 6 g Surface pressure: Max. 20 N/mm ² Operating temperature: -40...+100 °C (-40...+212 °F)	E-Series EH, EE, ET (rod) G-Series V/G-Series GH5, GT, GTE GB-Series GB R-Series RH, RD4, RT4, RF R-Series V RH5, RM5, RDV, RFV, RF5, RD5 T-Series TH

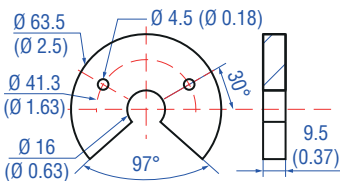
Drawing	Name & part number	Description	Series & design
	Ring magnet OD25.4 Part no. 400 533	Material: PA ferrite Weight: Approx. 10 g Surface pressure: Max. 40 N/mm ² Operating temperature: -40...+120 °C (-40...+248 °F) Marked version for sensors with internal linearization: Part no. 253 621	E-Series EH, EE, ET (rod) G-Series V/G-Series GH5, GT, GTE GB-Series GB R-Series RH, RD4, RT4 R-Series V RH5, RM5, RDV, RD5 T-Series TH
	Ring magnet OD17.4 Part no. 401 032	Material: PA neobond Weight: Approx. 5 g Surface pressure: Max. 20 N/mm ² Operating temperature: -40...+105 °C (-40...+221 °F)	E-Series EH, EE, ET (rod) G-Series V/G-Series GH5, GT, GTE GB-Series GB R-Series RH, RD4, RT4 R-Series V RH5, RM5, RDV, RD5 T-Series TH
	Ring magnet Part no. 401 468	Material: PA ferrite Weight: Approx. 17 g Surface pressure: Max. 20 N/mm ² Operating temperature: -40...+100 °C (-40...+212 °F) Contact application engineering for handling guidelines.	E-Series EH, EE, ET (rod) G-Series V/G-Series GH5, GT, GTE GB-Series GB R-Series RH, RD4, RT4, RF R-Series V RH5, RM5, RDV, RFV, RF5, RD5 T-Series TH

Recommended accessories are marked with the following sign:

Controlling design dimensions are in millimeters and measurements in () are in inches

Drawing	Name & part number	Description	Series & design
	Ring magnet Part no. 402 316	Material: PA ferrite coated Weight: Approx. 13 g Surface pressure: Max. 20 N/mm ² Operating temperature: -40...+100 °C (-40...+212 °F)	E-Series EH, EE, ET (rod) G-Series V/G-Series GH5, GT, GTE GB-Series GB R-Series RH, RD4, RT4, RF R-Series V RH5, RM5, RDV, RFV, RF5, RD5 T-Series TH
	Ring magnet OD60 Part no. MT0162	Material: AlCuMgPb, magnets compound-filled Weight: Approx. 90 g Surface pressure: Max. 20 N/mm ² Fastening torque for M4 screws: 1 Nm Operating temperature: -40...+75 °C (-40...+167 °F)	E-Series EH, EE, ET (rod) G-Series V/G-Series GH5, GT, GTE GB-Series GB R-Series RH, RD4, RT4, RF R-Series V RH5, RM5, RDV, RFV, RF5, RD5 T-Series TH

1.2 U-magnets

Drawing	Name & part number	Description	Series & design
	U-magnet OD63.5 Part no. 201 553	Material: PA 66-GF30, magnets compound-filled Weight: Approx. 26 g Surface pressure: 20 N/mm ² Fastening torque for M4 screws: 1 Nm Operating temperature: -40...+75 °C (-40...+167 °F)	E-Series EH, EE, ET (rod) G-Series V/G-Series GH5, GT, GTE GB-Series GB R-Series RH, RD4, RT4, RF R-Series V RH5, RM5, RDV, RFV, RF5, RD5 T-Series TH

Drawing	Name & part number	Description	Series & design
	U-magnet OD33 Part no. 251 416-2	Material: PA ferrite GF20 Weight: Approx. 11 g Surface pressure: Max. 40 N/mm ² Fastening torque for M4 screws: 1 Nm Operating temperature: -40...+120 °C (-40...+248 °F) Marked version for sensors with internal linearization: Part no. 254 226	E-Series EH, EP, EE, ET (rod/profile) G-Series V/G-Series GH5, GP5, GT, GTE GB-Series GB R-Series RH, RP, RD4, RT4, RF (HFP) R-Series V RH5, RP5, RM5, RDV, RFV (HFP), RF5 (HFP), RD5 T-Series TH
	R		
	U-magnet Part no. 252 185	Material: AIMg4.5Mn, black anodised; magnets compound-filled Weight: Approx. 125 g Surface pressure: Max. 20 N/mm ² Fastening torque for M4 screws: 4 Nm Operating temperature: -40...+75 °C (-40...+167 °F) This magnet may influence the sensor performance specifications for some applications.	E-Series EH, EP, EL, EE, ET (rod/profile) G-Series V/G-Series GH5, GP5, GT, GTE GB-Series GB R-Series RH, RP, RD4, RT4, RF R-Series V RH5, RP5, RM5, RDV, RFV, RF5, RD5 T-Series TH
	R		

1.3 Magnet sliders

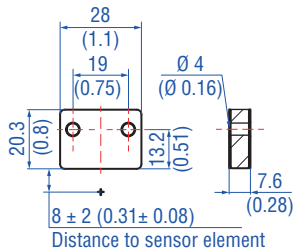
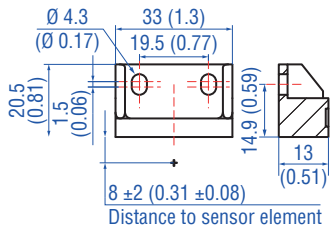
Drawing	Name & part number	Description	Series & design
	Magnet slider S, joint at top Part no. 252 182	Material: GRP, magnet hard ferrite Weight: Approx. 35 g Operating temperature: -40...+85 °C (-40...+185 °F)	E-Series EP, EL, ET (profile) G-Series V GP5 R-Series RP R-Series V RP5
	R		

Recommended accessories are marked with the following sign:

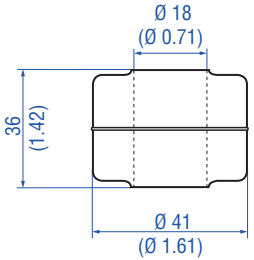
Controlling design dimensions are in millimeters and measurements in () are in inches

Drawing	Name & part number	Description	Series & design
	Magnet slider N longer ball-joint arm Part no. 252 183	Material: GRP, magnet hard ferrite Weight: Approx. 35 g Operating temperature: -40...+85 °C (-40...+185 °F)	E-Series EP, EL, ET (profile) G-Series V GP5 R-Series RP R-Series V RP5
	Magnet slider V, joint at front Part no. 252 184	Material: GRP, magnet hard ferrite Weight: Approx. 35 g Operating temperature: -40...+85 °C (-40...+185 °F)	E-Series EP, EL, ET (profile) G-Series V GP5 R-Series RP R-Series V RP5
	Magnet slider G, backlash free Part no. 253 421	Material: GRP, magnet hard ferrite Weight: Approx. 25 g Operating temperature: -40...+85 °C (-40...+185 °F)	E-Series EP, EL, ET (profile) G-Series V GP5 R-Series RP R-Series V RP5
	Magnet slider P, with additional end plates Part no. 253 673	Material: GRP, magnet hard ferrite Weight: Approx. 38 g Operating temperature: -40...+75 °C (-40...+167 °F)	E-Series EP, EL, ET (profile) G-Series V GP5 R-Series RP R-Series V RP5

1.4 Block magnets

Drawing	Name & part number	Description	Series & design
	<p>Block magnet K Part no. 251 298-2</p>	<p>Material: XOLOX Neobond 50L Weight: Approx. 22 g Surface pressure: Max. 20 N/mm² Fastening torque for M4 screws: 1 Nm Operating temperature: -40...+105 °C (-40...+221 °F)</p> <p>This magnet may influence the sensor performance specifications for some applications.</p>	<p>E-Series</p> <p>EH, EP, EL, EE, ET (rod/profile)</p>
			<p>G-Series V</p> <p>GH5, GP5</p> <p>GB-Series</p> <p>GB</p> <p>R-Series</p> <p>RH, RP, RD4, RF</p> <p>R-Series V</p> <p>RH5, RP5, RM5, RDV, RFV, RF5, RD5</p> <p>T-Series</p> <p>TH</p>
	<p>Block magnet L Part no. 403 448</p>	<p>Material: Plastic carrier with neodymium magnet Weight: Approx. 20 g Fastening torque for M4 screws: 1 Nm Operating temperature: -40...+75 °C (-40...+167 °F)</p> <p>This magnet may influence the sensor performance specifications for some applications.</p>	<p>E-Series</p> <p>EH, EP, EP2, EL, EE, ET (rod/profile)</p>
			<p>G-Series V</p> <p>GH5, GP5</p> <p>GB-Series</p> <p>GB</p> <p>R-Series</p> <p>RH, RP, RD4, RF</p> <p>R-Series V</p> <p>RH5, RP5, RM5, RDV, RFV, RF5, RD5</p> <p>T-Series</p> <p>TH</p>

1.5 Floats

Drawing	Name & part number	Description	Series & design
	<p>Float Part no. 200 938-2</p>	<p>Material: Stainless steel (AISI 316L) Weight offset: Yes Pressure: 8.6 bar (125 psi) Magnet offset: No Specific gravity: Max. 0.74 Operating temperature: -40...+125 °C (-40...+257 °F)</p>	<p>E-Series</p> <p>EH, EE, ET (rod)</p>
			<p>G-Series V/G-Series</p> <p>GH5, GT, GTE</p> <p>GB-Series</p> <p>GB</p> <p>R-Series</p> <p>RH, RD4, RT4, RF</p> <p>R-Series V</p> <p>RH5, RM5, RDV, RFV, RF5, RD5</p> <p>T-Series</p> <p>TH</p>

- Be sure that the float specific gravity is at least 0.05 less than that of the measured liquid as a safety margin at ambient temperature.
- For interface measurement: A minimum of 0.05 specific gravity differential is required between the upper and lower liquids.
- When the magnet is not shown, the magnet is positioned at the center line of float.

- An offset weight is installed in the float to bias or tilt the float installed on the sensor tube. So the float remains in contact with the sensor tube at all times and guarantees permanent potential equalization of the float. The offset is required for installations that must conform to hazardous location standards.

Controlling design dimensions are in millimeters and measurements in () are in inches

Drawing	Name & part number	Description	Series & design
	Float Part no. 201 605-2	Material: Stainless steel 1.4571 (AISI 316 Ti) Weight offset: Yes Pressure: 4 bar (60 psi) Magnet offset: Yes Specific gravity: Max. 0.6 Operating temperature: -40...+125 °C (-40...+257 °F)	E-Series EH, EE, ET (rod) G-Series V/G-Series GH5, GT, GTE GB-Series GB R-Series RH, RD4, RT4, RF R-Series V RH5, RM5, RDV, RFV, RF5, RD5 T-Series TH
	Float Part no. 201 606-2	Material: Stainless steel 1.4571 (AISI 316 Ti) Weight offset: Yes Pressure: 4 bar (60 psi) Magnet offset: Yes Specific gravity: 0.93 ± 0.01 Operating temperature: -40...+125 °C (-40...+257 °F)	E-Series EH, EE, ET (rod) G-Series V/G-Series GH5, GT, GTE GB-Series GB R-Series RH, RD4, RT4, RF R-Series V RH5, RM5, RDV, RFV, RF5, RD5 T-Series TH
	Float Part no. 251 981-2	Material: Stainless steel (AISI 316L) Pressure: 29.3 bar (425 psi) Specific gravity: Max. 0.67 Operating temperature: -40...+125 °C (-40...+257 °F)	E-Series EH, EE, ET (rod) G-Series V/G-Series GH5, GT, GTE GB-Series GB R-Series RH, RD4, RT4, RF R-Series V RH5, RM5, RDV, RFV, RF5, RD5 T-Series TH

- Be sure that the float specific gravity is at least 0.05 less than that of the measured liquid as a safety margin at ambient temperature.
- For interface measurement: A minimum of 0.05 specific gravity differential is required between the upper and lower liquids.
- When the magnet is not shown, the magnet is positioned at the center line of float.

- An offset weight is installed in the float to bias or tilt the float installed on the sensor tube. So the float remains in contact with the sensor tube at all times and guarantees permanent potential equalization of the float. The offset is required for installations that must conform to hazardous location standards.


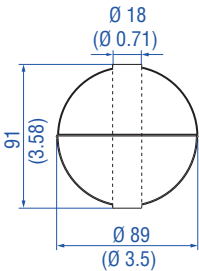
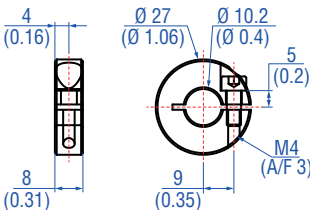
Controlling design dimensions are in millimeters and measurements in () are in inches

Drawing	Name & part number	Description	Series & design
	Float Part no. 251 982-2	Material: Stainless steel (AISI 316L) Pressure: 29.3 bar (425 psi) Specific gravity: Max. 0.93 Operating temperature: -40...+125 °C (-40...+257 °F)	E-Series EH, EE, ET (rod) G-Series V/G-Series GH5, GT, GTE GB-Series GB R-Series RH, RD4, RT4, RF R-Series V RH5, RM5, RDV, RFV, RF5, RD5 T-Series TH
	Float Part no. 251 983-2	Material: Stainless steel (AISI 316L) Weight offset: Yes Pressure: 29.3 bar (425 psi) Magnet offset: No Specific gravity: 1.06 ± 0.01 Operating temperature: -40...+125 °C (-40...+257 °F)	E-Series EH, EE, ET (rod) G-Series V/G-Series GH5, GT, GTE GB-Series GB R-Series RH, RD4, RT4, RF R-Series V RH5, RM5, RDV, RFV, RF5, RD5 T-Series TH
	Float Part no. 251 387-2	Material: Stainless steel (AISI 316L) Weight offset: Yes Pressure: 22.4 bar (325 psi) Magnet offset: No Specific gravity: Max. 0.48 Operating temperature: -40...+125 °C (-40...+257 °F)	E-Series EH, EE, ET (rod) G-Series V/G-Series GH5, GT, GTE GB-Series GB R-Series RH, RD4, RT4, RF R-Series V RH5, RM5, RFV, RDV, RF5, RD5 T-Series TH

- Be sure that the float specific gravity is at least 0.05 less than that of the measured liquid as a safety margin at ambient temperature.
- For interface measurement: A minimum of 0.05 specific gravity differential is required between the upper and lower liquids.
- When the magnet is not shown, the magnet is positioned at the center line of float.

- An offset weight is installed in the float to bias or tilt the float installed on the sensor tube. So the float remains in contact with the sensor tube at all times and guarantees permanent potential equalization of the float. The offset is required for installations that must conform to hazardous location standards.

Controlling design dimensions are in millimeters and measurements in () are in inches

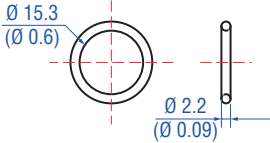
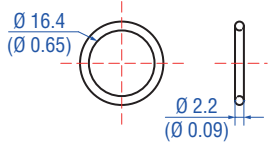
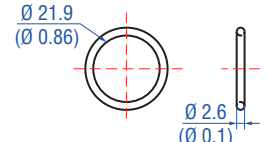
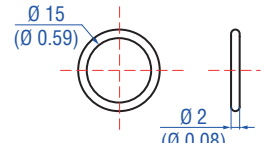
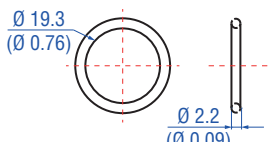
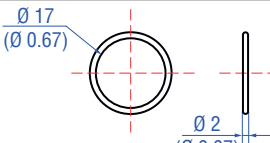
Drawing	Name & part number	Description	Series & design
	Float Part no. 251 447	Material: Stainless steel (AISI 304) Specific gravity: Max. 0.72 Pressure: Max. 60 bar (870 psi) Operating temperature: -40...+145 °C (-40...+293 °F)	E-Series EH, EE, ET (rod) G-Series V/G-Series GH5, GT, GTE GB-Series GB R-Series RH, RD4, RT4, RF R-Series V RH5, RM5, RDV, RFV, RF5, RD5 T-Series TH
	Float Part no. 251 469-2	Material: Stainless steel (AISI 316L) Weight offset: Yes Pressure: 29.3 bar (425 psi) Magnet offset: No Specific gravity: Max. 0.45 Operating temperature: -40...+125 °C (-40...+257 °F)	E-Series EH, EE, ET (rod) G-Series V/G-Series GH5, GT, GTE GB-Series GB R-Series RH, RD4, RT4, RF R-Series V RH5, RM5, RDV, RFV, RF5, RD5 T-Series TH
	Stop collar for Ø 10 mm rods (hex key 3 mm) Part no. 255 242	Provides end of stroke stops for float Material: Stainless steel 1.4301 (AISI 304) Weight: Approx. 30 g Hex key 3 mm required Fastening torque: 2...4 Nm	E-Series EH, EE, ET (rod) G-Series V/G-Series GH5, GT, GTE GB-Series GB R-Series RH, RD4, RT4 R-Series V RH5, RM5, RDV, RF5, RD5 T-Series TH

- Be sure that the float specific gravity is at least 0.05 less than that of the measured liquid as a safety margin at ambient temperature.
- For interface measurement: A minimum of 0.05 specific gravity differential is required between the upper and lower liquids.
- When the magnet is not shown, the magnet is positioned at the center line of float.


- An offset weight is installed in the float to bias or tilt the float installed on the sensor tube. So the float remains in contact with the sensor tube at all times and guarantees permanent potential equalization of the float. The offset is required for installations that must conform to hazardous location standards.

Controlling design dimensions are in millimeters and measurements in () are in inches

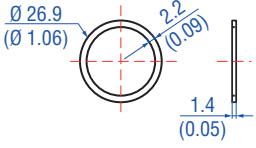
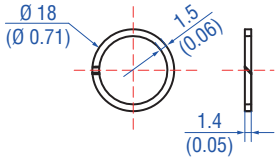
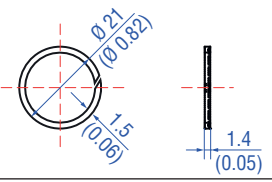
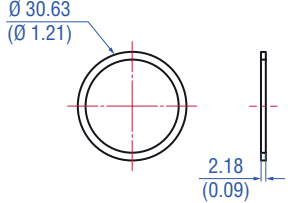
2. O-rings

Drawing	Name & part number	Description	Series & design
	O-ring for threaded flange M18×1.5-6g Part no. 401 133	Material: Fluoroelastomer Durometer: 75 ±5 Shore A Operating temperature: -40...+204 °C (-40...+400 °F)	E-Series EH, ET (rod) G-Series V/G-Series GH5, GT GB-Series GB R-Series RH, RD4, RF (HD) R-Series V RH5, RM5, RDV, RFV (HD), RF5 (HD), RD5 T-Series TH
	O-ring for threaded flange ¾"-16 UNF-3A Part no. 560 315	Material: Fluoroelastomer Durometer: 75 ±5 Shore A Operating temperature: -40...+204 °C (-40...+400 °F)	E-Series EH, ET (rod) G-Series V/G-Series GH5, GT GB-Series GB R-Series RH, RD4, RF (HL/HP) R-Series V RH5, RM5, RDV, RFV (HL/HP), RF5 (HL/HP), RD5 T-Series TH
	O-ring for pressure fit flange Ø 26.9 mm Part no. 560 705	Material: Nitrile rubber Operating temperature: -53...+107 °C (-65...+225 °F)	R-Series RD4 R-Series V RDV, RD5
	O-ring for pressure fit flange Ø 18 mm Part no. 560 853	Material: Fluoroelastomer Durometer: 75 Shore A Operating temperature: -40...+200 °C (-40...+392 °F)	GB-Series GB
	O-ring for threaded flange M22×1.5-6g Part no. 561 337	Material: FPM Durometer: 75 Shore A Operating temperature: -20...+200 °C (-6...+392 °F)	R-Series RH R-Series V RH5
	O-ring for pressure fit flange Ø 21 mm Part no. 561 438	Material: FKM Durometer: 75 Shore A Operating temperature: -18...+200 °C (-0.4...+392 °F)	GB-Series GB

Controlling design dimensions are in millimeters and measurements in () are in inches

Drawing	Name & part number	Description	Series & design
	O-ring for pressure fit flange Ø 30 mm Part no. 562 062	Material: Nitrile rubber Durometer: 70 Shore A Operating temperature: -40...+75 °C (-40...+167 °F)	R-Series V RFV (H3), RF5 (H3)

3. Back-up rings

Drawing	Name & part number	Description	Series & design
	Back-up ring for pressure fit flange Ø 26.9 mm Part no. 560 629	Material: Polymyte Durometer: 90 Shore A	R-Series RD4 R-Series V RDV, RD5
	Back-up ring for pressure fit flange Ø 18 mm Part no. 561 115	Material: PTFE + 60 % bronze	GB-Series GB
	Back-up ring for pressure fit flange Ø 21 mm Part no. 561 439	Material: PTFE	GB-Series GB
	Back-up ring for pressure fit flange Ø 30 mm Part no. 562 061	Material: Nitrile rubber Durometer: 90 Shore A	R-Series V RFV (H3), RF5 (H3)

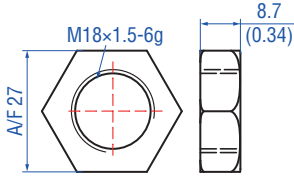
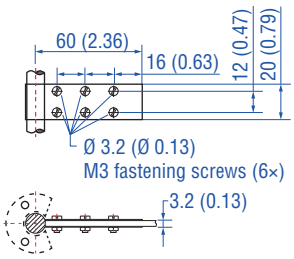

4. Mounting accessories

4.1 General accessories

Photo/Drawing	Name & part number	Description	Series & design
	Rod end with M6 thread Part no. 254 210	Material: Galvanized steel	E-Series ER-M
	Rod end with 1/4"-28 UNF thread Part no. 254 235	Material: Galvanized steel	E-Series ER-S
	Magnet spacer Part no. 400 633	Material: Aluminum Weight: Approx. 5 g Surface pressure: Max. 20 N/mm ² Fastening torque for M4 screws: 1 Nm	E-Series EH, EE, ET (rod) G-Series V/G-Series GH5, GT, GTE GB-Series GB R-Series RH, RD4, RT4 R-Series V RH5, RM5, RDV, RD5 T-Series TH
	Mounting clamp Part no. 400 802	Material: Stainless steel (AISI 304)	E-Series ET (profile) G-Series V GP5 R-Series RP, RF (HFP) R-Series V RP5, RFV (HFP), RF5 (HFP)

Controlling design dimensions are in millimeters and measurements in () are in inches

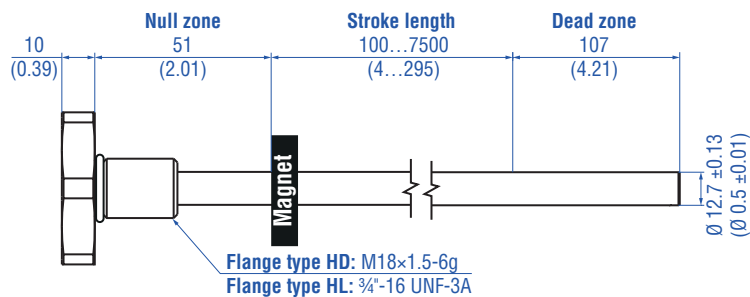
Photo/Drawing	Name & part number	Description	Series & design
	T-nut Part no. 401 602	Fastening torque for M5 screw: 4.5 Nm	E-Series ET (profile) G-Series V GP5 R-Series RP R-Series V RP5
	Mounting clamp Part no. 403 508	Material: Stainless steel 1.4301/1.4305 (AISI 304/303)	E-Series EP, EP2, EL, ER
	Threaded flange M18×1.5-6g Part no. 404 874	Material: Stainless steel 1.4305 (AISI 303) Order O-rings separately: O-ring 15×2: Part no. 560 853 O-ring 15.3×2.2: Part no. 401 133	R-Series RF R-Series V RFV, RF5
	Threaded flange 3/4"-16 UNF-3A Part no. 404 875	Material: Stainless steel 1.4305 (AISI 303) Order O-rings separately: O-ring 15×2: Part no. 560 853 O-ring 16.4×2.2: Part no. 560 315	R-Series RF R-Series V RFV, RF5
	Hex jam nut 3/4"-16 UNF-3A Part no. 500 015	Material: Steel, zinc plated	E-Series EH, ET (rod) G-Series V/G-Series GH5, GT GB-Series GB R-Series RH, RD4, RT4, RF (HL/HP) R-Series V RH5, RM5, RDV, RFV (HL/HP), RF5 (HL/HP), RD5 T-Series TH

Photo/Drawing	Name & part number	Description	Series & design
	<p>Hex jam nut M18x1.5-6g Part no. 500 018</p>	<p>Material: Steel, zinc plated</p>	<p>E-Series</p> <p>EH, ET (rod)</p> <p>G-Series V/G-Series</p> <p>GH5, GT</p> <p>GB-Series</p> <p>GB</p> <p>R-Series</p> <p>RH, RD4, RT4, RF (HD)</p> <p>R-Series V</p> <p>RH5, RM5, RDV, RFV (HD), RF5 (HD), RD5</p> <p>T-Series</p> <p>TH</p>
	<p>Fixing clip Part no. 561 481</p>	<p>Application: Used to secure sensor rods (Ø 10 mm (Ø 0.39 in.)) when using an U-magnet or block magnet Material: Brass, non-magnetic</p>	<p>E-Series</p> <p>EH, ET (rod), EE</p> <p>G-Series V/G-Series</p> <p>GH5, GT, GTE</p> <p>GB-Series</p> <p>GB</p> <p>R-Series</p> <p>RH, RD4, RT4</p> <p>R-Series V</p> <p>RH5, RM5, RDV, RD5</p> <p>T-Series</p> <p>TH</p>
	<p>Adapter plate Part no. 255 198</p>	<p>Adapter plate for mounting an RFV-B as replacement for an RF-C. Order the RFV-B with the addition H003</p>	<p>R-Series V</p> <p>RFV</p>

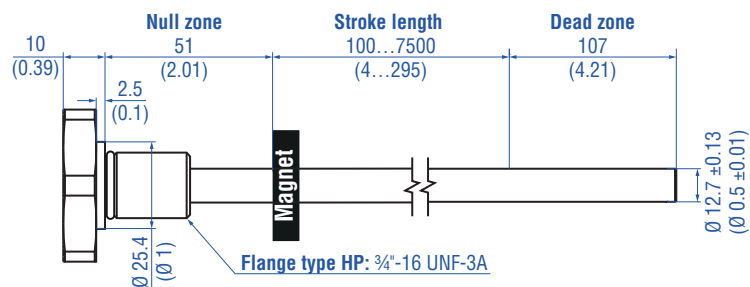
4.2 Sensor rod HD/HL/HP for R-Series V RFV & RF5

The sensor rod HD/HL/HP is a support tube for the R-Series V RFV & RF5. See the R-Series V operation manual for installation.

HD (with threaded flange M18x1.5-6g)/HL (with threaded flange 3/4"-16 UNF-3A) optional sensor rod



HP (with threaded flange 3/4"-16 UNF-3A with raised-face) optional sensor rod



Controlling design dimensions are in millimeters and measurements in () are in inches

TECHNICAL DATA

Operating conditions

Operating pressure 350 bar (5076 psi)/700 bar (10153 psi) peak (at 10 × 1 min) for sensor rod

Design/Material

Sensor flange Stainless steel 1.4305 (AISI 303)

Sensor rod Stainless steel 1.4301 (AISI 304)

Stroke length 100...7500 mm (4...295 in.)

ORDER CODE

1	2	3	4	5	6	7
H						
a		b				

a		Design
H	D	Threaded flange M18×1.5-6g
H	L	Threaded flange ¾"-16 UNF-3A
H	P	Threaded flange ¾"-16 UNF-3A with raised-face

b		Stroke length			
X	X	X	X	M	0100...7500 mm
Standard stroke length (mm)		Ordering steps			
100 ... 1000 mm		50 mm			
1000 ... 5000 mm		100 mm			
5000 ... 7500 mm		250 mm			
X	X	X	X	U	001.0...295.0 in.
Standard stroke length (in.)		Ordering steps			
4 ... 40 in.		2 in.			
40 ... 197 in.		4 in.			
197 ... 295 in.		10 in.			

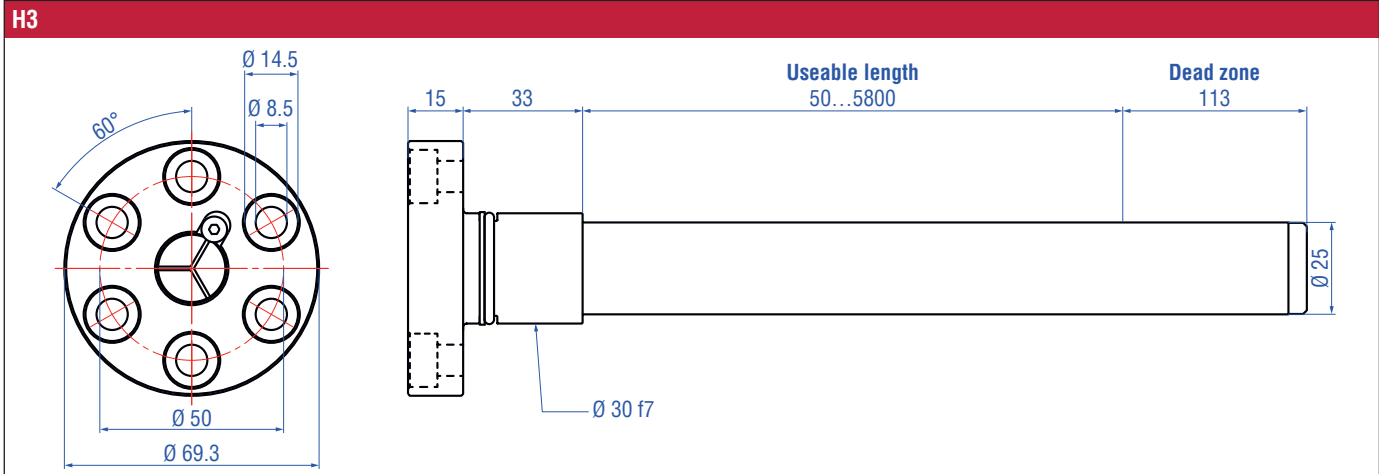
DELIVERY



- Sensor rod
- O-ring

4.3 Sensor rod H3 for R-Series V RFV & RF5

The sensor rod H3 is a support tube for guiding three R-series V RFV or RF5 sensors. See the data sheet of the sensor rod H3 (document no. [552162](#)) for installation.



TECHNICAL DATA

Design/Material	
Flange	Stainless steel 1.4305
Sensor rod	Stainless steel 1.4307
Useable length	50...5800 mm
Mechanical mounting	
Mounting	Fastening via 6 × cylinder head screws M8 on the cylinder (fastening torque 34 Nm/ISO 4762-M8 of A2-70)
Operating conditions	
Operating temperature	-40...+85 °C
Operating pressure	350 bar

ORDER CODE

1	2	3	4	5	6	7	8	9
H	3	S	0					M
a		b	c	d				


a	Model
H 3	Sensor rod with 3 chambers for 3 RFV/RF5 sensors

b	Design
S	Pressure fit flange Ø 30 mm, Ø 25 mm rod

c	Options
0	No options

d	Useable length
X X X X M	0050...5800 mm

DELIVERY

-  **H3 sensor rod**
- Sensor rod
 - O-ring
 - Back-up ring

4.4 Profile HFP for R-Series V RFV & RF5

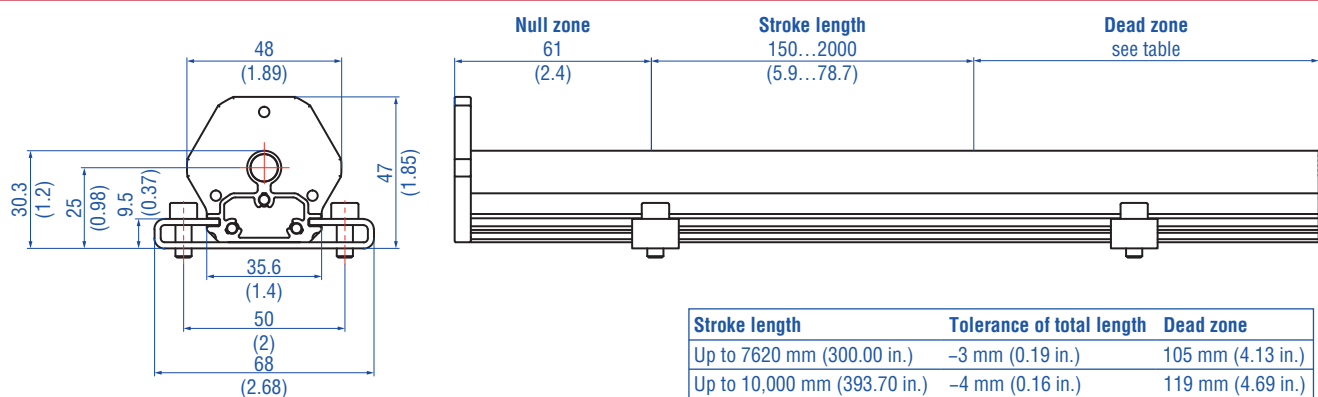
The HFP consists of a base profile, which is available in stroke lengths ranging from 150 to 2000 mm (6...79 in.). Depending on the required stroke length, different extension profiles can be added to this base profile so that a total stroke length of 150...20,000 mm (6...787 in.) is possible.

The profiles are put together on site and sealed with an end cap. The HFP can be used with the following magnets:

- U-magnet OD33 (part no. 251 416-2), see chapter 1.2 on page 6
- U-magnet (part no. 252 185), see chapter 1.2 on page 6
- Block magnet K (part no. 251 298-2), see chapter 1.4 on page 9
- Block magnet L (part no. 403 448), see chapter 1.4 on page 9

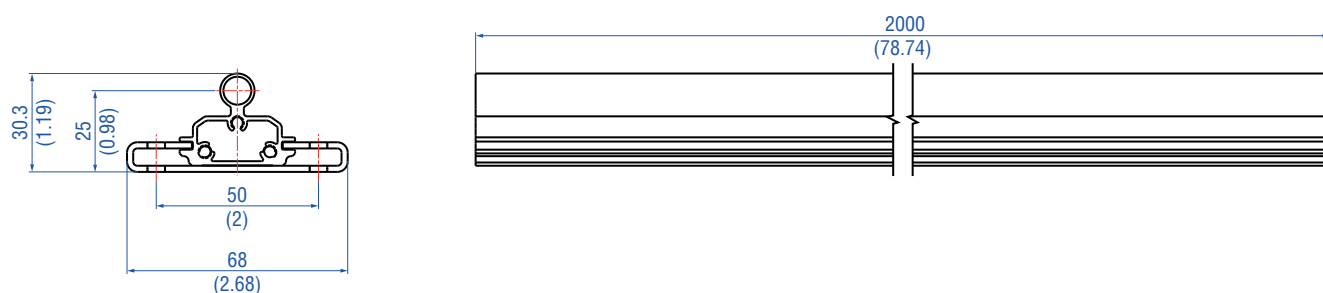
See the R-Series V operation manual for installation.

HFP base profile



Note: Tolerance of total length has no influence on the stroke length.

HFP extension profile (0...9 pieces, depending on ordered stroke length)



Controlling design dimensions are in millimeters and measurements in () are in inches

TECHNICAL DATA

Operating conditions

Ingress protection IP30

Design / Material

Sensor profile Aluminum

Stroke length HFP base profile: 150...2000 mm (6...78.74 in.)
HFP extension profile: 2000 mm (78.74 in.)

NOTICE

Contact Temposonics if you would like to use the HFP for the R-Series 2004 RF.

ORDER CODE

1	2	3	4	5	6	7	8	9
H	F	P						
a			b					

a	Design		
H	F	P	Profile

b	Stroke length					
X	X	X	X	X	M	00150...20000 mm
Standard stroke length (mm)		Ordering steps				
150 ... 1000 mm		50 mm				
1000 ... 5000 mm		100 mm				
5000 ... 10000 mm		250 mm				
10000 ... 15000 mm		500 mm				
15000 ... 20000 mm		1000 mm				
X	X	X	X	X	U	0006.0...0787.0 in.
Standard stroke length (in.)		Ordering steps				
6 ... 40 in.		2 in.				
40 ... 197 in.		4 in.				
197 ... 393 in.		10 in.				
393 ... 590 in.		19 in.				
590 ... 787 in.		39 in.				

DELIVERY



- 1 × base profile incl. accessories (5 × mounting clamps + 1 × end cap) (Part no. 255199Mxxxx)
- Number of extension profiles depending on ordered stroke length (Part no. 403617M2000)
- Number of accessories for extension profile depending on ordered stroke length (5 × mounting clamps, 4 × connecting pins + 1 × gasket) (Part no. 254300)



5. Connectors

5.1 Overview

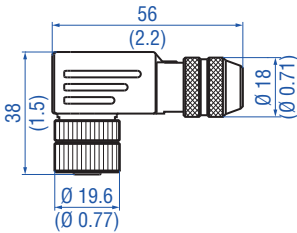
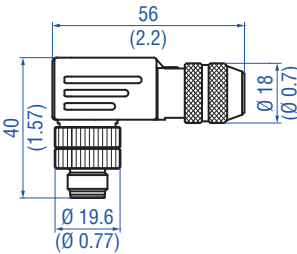
E-Series	G-Series V/G-Series	R-Series	R-Series
Analog – D34 <i>with 1 × M12 male connector</i>	Analog – D60 <i>with 1 × M16 male connector</i>	CANbus – D54 <i>with 1 × M8 male connector, 1 × M12 female connector & 1 × M12 male connector</i>	PROFIBUS – D53 <i>with 1 × M8 male connector, 1 × M12 female connector & 1 × M12 male connector</i>
Mating connector	Mating connector	Mating connector	Mating connector
M12 A-coded female connector (4 pin/5 pin), straight Part no. 370 677	M16 female connector (6 pin), straight Part no. 370 423	Power connector M8 female (4 pin), straight Part no. 370 504	Power connector M8 female (4 pin), straight Part no. 370 504
M12 A-coded female connector (5 pin), angled Part no. 370 678	M16 female connector (6 pin), angled Part no. 370 460	Power connector M8 female (4 pin), angled Part no. 560 886	Power connector M8 female (4 pin), angled Part no. 560 886
CANbus – D34 <i>with 1 × M12 male connector</i>	Digital – D60 <i>with 1 × M16 male connector</i>	Signal connector M12 A-coded male connector (5 pin), straight Part no. 561 665	Signal connector M12 B-coded male connector (4 pin), straight Part no. 560 884
Mating connector	Mating connector	Signal connector M12 A-coded female (5 pin), straight Part no. 370 677	Signal connector M12 B-coded female connector (5 pin), angled Part no. 370 514
M12 A-coded female connector (4 pin/5 pin), straight Part no. 370 677	M16 female connector (6 pin), straight Part no. 370 423	Signal connector M12 A-coded female connector (5 pin), angled Part no. 370 678	Signal connector M12 B-coded male connector (5 pin), angled Part no. 370 515
M12 A-coded female connector (5 pin), angled Part no. 370 678	M16 female connector (6 pin), angled Part no. 370 460	CANbus – D60 <i>with 1 × M16 male connector</i>	Signal connector M12 B-coded female connector (4 pin), straight Part no. 560 885
IO-Link – D44 <i>with 1 × M12 male connector</i>	GB-Series	Mating connector	PROFIBUS – D63 <i>with 1 × M16 female connector & 1 × M16 male connector</i>
Mating connector	Analog – D34 <i>with 1 × M12 male connector</i>	M16 female connector (6 pin), straight Part no. 370 423	Mating connector
M12 A-coded female connector (4 pin/5 pin), straight Part no. 370 677	Mating connector	M16 female connector (6 pin), angled Part no. 370 460	M16 female connector (6 pin), straight Part no. 370 423
M12 A-coded female connector (5 pin), angled Part no. 370 678	M12 A-coded female connector (4 pin/5 pin), straight Part no. 370 677	CANbus – D62 <i>with 2 × M16 male connector</i>	M16 female connector (6 pin), angled Part no. 370 460
M12 A-coded female connector (5 pin), angled Part no. 370 678	M12 A-coded female connector (5 pin), angled Part no. 370 678	Mating connector	M16 female connector (6 pin), straight Part no. 370 423
Start/Stop – D84 <i>with 1 × M12 male connector</i>	Analog – D60 <i>with 1 × M16 male connector</i>	M16 female connector (6 pin), straight Part no. 370 423	M16 female connector (6 pin), angled Part no. 370 460
Mating connector	Mating connector	M16 female connector (6 pin), angled Part no. 370 460	M16 male connector (6 pin), straight Part no. 370 427
M12 A-coded female connector (8 pin), straight Part no. 370 694	M16 female connector (6 pin), straight Part no. 370 423	M16 female connector (6 pin), angled Part no. 370 460	M16 male connector (6 pin), angled Part no. 370 621
M12 A-coded female connector (8 pin), angled Part no. 370 699	M16 female connector (6 pin), angled Part no. 370 460	SSI – D70 <i>with 1 × M16 male connector</i>	
SSI – D84 <i>with 1 × M12 male connector</i>	SSI – D70 <i>with 1 × M16 male connector</i>	Mating connector	
Mating connector	Mating connector	M16 female connector (7 pin), straight Part no. 370 624	
M12 A-coded female connector (8 pin), straight Part no. 370 694	M16 female connector (6 pin), straight Part no. 370 423	M16 female connector (7 pin), angled Part no. 560 779	
M12 A-coded female connector (8 pin), angled Part no. 370 699	M16 female connector (6 pin), angled Part no. 370 460	SSI – D84 <i>with 1 × M12 male connector</i>	
	SSI – D84 <i>with 1 × M12 male connector</i>	Mating connector	
	Mating connector	M12 A-coded female connector (8 pin), straight Part no. 370 694	
	M12 A-coded female connector (8 pin), straight Part no. 370 694	M12 A-coded female connector (8 pin), angled Part no. 370 699	
	M12 A-coded female connector (8 pin), angled Part no. 370 699		

R-Series V	R-Series V	R-Series V
Analog – D34 <i>with 1 × M12 male connector</i>	EtherNet/IP™ – D56 <i>with 1 × M8 male connector & 2 × M12 female connector</i>	POWERLINK – MXX <i>with 2 × M12 male connector</i>
Mating connector	Mating connector	Mating connector
M12 A-coded female connector (4 pin/5 pin), straight Part no. 370 677	Power connector M8 female (4 pin), straight Part no. 370 504	Signal connector M12 D-coded male (4 pin), straight Part no. 370 523
M12 A-coded female connector (5 pin), angled Part no. 370 678	Power connector M8 female (4 pin), angled Part no. 560 886	PROFINET – D56 <i>with 1 × M8 male connector & 2 × M12 female connector</i>
Analog – D60 <i>with 1 × M16 male connector</i>	Signal connector M12 D-coded male (4 pin), straight Part no. 370 523	Mating connector
Mating connector	EtherNet/IP™ – D58 <i>with 1 × M12 female connector & 2 × M12 male connector</i>	Power connector M8 female (4 pin), straight Part no. 370 504
M16 female connector (6 pin), straight Part no. 370 423	Mating connector	Power connector M8 female (4 pin), angled Part no. 560 886
M16 female connector (6 pin), angled Part no. 370 460	Power connector M12 A-coded female (4 pin/5 pin), straight Part no. 370 677	Signal connector M12 D-coded male (4 pin), straight Part no. 370 523
EtherCAT® – D56 <i>with 1 × M8 male connector & 2 × M12 female connector</i>	Signal connector M12 D-coded male (4 pin), straight Part no. 370 523	PROFINET – D58 <i>with 1 × M12 female connector & 2 × M12 male connector</i>
Mating connector	EtherNet/IP™ – MXX <i>with 2 × M12 male connector</i>	Mating connector
Power connector M8 female (4 pin), straight Part no. 370 504	Mating connector	Power connector M12 A-coded female (4 pin/5 pin), straight Part no. 370 677
Power connector M8 female (4 pin), angled Part no. 560 886	Signal connector M12 D-coded male (4 pin), straight Part no. 370 523	Signal connector M12 D-coded male (4 pin), straight Part no. 370 523
Signal connector M12 D-coded male (4 pin), straight Part no. 370 523	POWERLINK – D56 <i>with 1 × M8 male connector & 2 × M12 female connector</i>	PROFINET – MXX <i>with 2 × M12 male connector</i>
EtherCAT® – D58 <i>with 1 × M12 female connector & 2 × M12 male connector</i>	Mating connector	Mating connector
Mating connector	Power connector M8 female (4 pin), straight Part no. 370 504	Signal connector M12 D-coded male (4 pin), straight Part no. 370 523
Power connector M12 A-coded female (4 pin/5 pin), straight Part no. 370 677	Power connector M8 female (4 pin), angled Part no. 560 886	SSI – D70 <i>with 1 × M16 male connector</i>
Signal connector M12 D-coded male (4 pin), straight Part no. 370 523	Signal connector M12 D-coded male (4 pin), straight Part no. 370 523	Mating connector
EtherCAT® – MXX <i>with 2 × M12 male connector</i>	POWERLINK – D58 <i>with 1 × M12 female connector & 2 × M12 male connector</i>	M16 female connector (7 pin), straight Part no. 370 624
Mating connector	Mating connector	M16 female connector (7 pin), angled Part no. 560 779
Signal connector M12 D-coded male (4 pin), straight Part no. 370 523	Power connector M12 A-coded female (4 pin/5 pin), straight Part no. 370 677	SSI – D84 <i>with 1 × M12 male connector</i>
	Signal connector M12 D-coded male (4 pin), straight Part no. 370 523	Mating connector
		M12 A-coded female connector (8 pin), straight Part no. 370 694
		M12 A-coded female connector (8 pin), angled Part no. 370 699

5.2 M8 connector


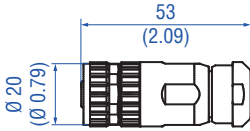

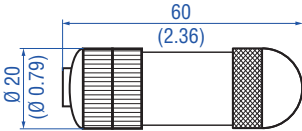
Drawing	Name & part number	Description	Series & output	
	M8 female connector (4 pin), straight Part no. 370 504	Material: CuZn nickel plated Termination: Solder Cable Ø: 3.5...5 mm (0.14...0.28 in.) Wire: 0.25 mm ² Operating temperature: -40...+85 °C (-40...+185 °F) Ingress protection: IP67 (correctly fitted) Fastening torque: 0.5 Nm	R-Series	
			CANbus	D54
			PROFIBUS	D53
			R-Series V	
			EtherCAT®	D56
			EtherNet/IP™	D56
			POWERLINK	D56
PROFINET	D56			
	M8 female connector (4 pin), angled Part no. 560 886	Material: PA Termination: Solder Cable Ø: 3.5...5 mm (0.14...0.28 in.) Wire: 0.25 mm ² (AWG 24) Operating temperature: -40...+85 °C (-40...+185 °F) Ingress protection: IP67 (correctly fitted) Fastening torque: 0.5 Nm	R-Series	
			CANbus	D54
			PROFIBUS	D53
			R-Series V	
			EtherCAT®	D56
			EtherNet/IP™	D56
			POWERLINK	D56
PROFINET	D56			

5.3 M12 connectors

Drawing	Name & part number	Description	Series & output
	M12 B-coded female connector (5 pin), angled Part no. 370 514	Material: Zinc nickel plated Termination: Screw Contact insert: Silver plated Cable Ø: 6...8 mm (0.24...0.31 in.) Wire: 0.75 mm ² (18 AWG) Operating temperature: -40...+85 °C (-40...+185 °F) Ingress protection: IP67 (correctly fitted) Fastening torque: 0.4 Nm	R-Series
			PROFIBUS
	M12 B-coded male connector (5 pin), angled Part no. 370 515	Material: Zinc nickel plated Termination: Screw Contact insert: Silver plated Cable Ø: 6...8 mm (0.24...0.31 in.) Wire: 0.75 mm ² (18 AWG) Operating temperature: -40...+85 °C (-40...+185 °F) Ingress protection: IP67 (correctly fitted) Fastening torque: 0.4 Nm	R-Series
			PROFIBUS

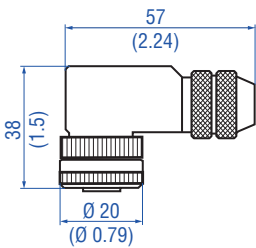
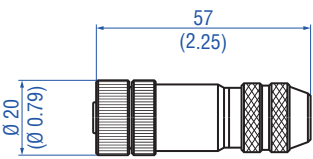
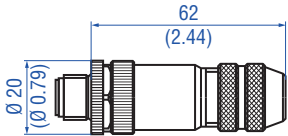


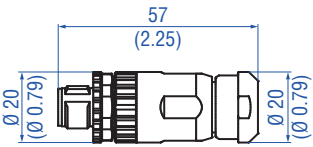
NOTICE

Follow the manufacturer's mounting instructions.

Drawing	Name & part number	Description	Series & output
	M12 D-coded male connector (4 pin), straight Part no. 370 523	Material: Zinc nickel-plated Termination: Insulation-displacement Cable Ø: 6...7.2 mm (0.2...0.28 in.) Wire: 24 AWG – 22 AWG Operating temperature: –25...+85 °C (–13...+185 °F) Ingress protection: IP65 / IP67 (correctly fitted) Fastening torque: 0.6 Nm	R-Series V EtherCAT® D56, D58, MXX EtherNet/IP™ D56, D58, MXX POWERLINK D56, D58, MXX PROFINET D56, D58, MXX
	M12 A-coded female connector (4 pin/5 pin), straight Part no. 370 677	Material: GD-Zn, Ni Termination: Screw Contact insert: CuZn Cable Ø: 4...8 mm (0.16...0.31 in.) Wire: Max. 1.5 mm ² (16 AWG) Operating temperature: –30...+85 °C (–22...+185 °F) Ingress protection: IP67 (correctly fitted) Fastening torque: 0.6 Nm	E-Series Analog D34 CANbus D34 IO-Link D44 GB-Series Analog D34 R-Series CANbus D54 R-Series V Analog D34 EtherCAT® D58 EtherNet/IP™ D58 POWERLINK D58 PROFINET D58
	M12 A-coded female connector (5 pin), angled Part no. 370 678	Material: GD-Zn, Ni Termination: Screw Contact insert: CuZn Cable Ø: 5...8 mm (0.2...0.31 in.) Wire: Max 0.75 mm ² (18 AWG) Operating temperature: –25...+85 °C (–13...+185 °F) Ingress protection: IP67 (correctly fitted) Fastening torque: 0.4 Nm	E-Series Analog D34 CANbus D34 IO-Link D44 GB-Series Analog D34 R-Series CANbus D54 R-Series V Analog D34
	M12 A-coded female connector (8 pin), straight Part no. 370 694	Housing: GD-ZnAL Termination: Screw Contact insert: CuZn Cable Ø: 4...9 mm (0.16...0.35 in.) Wire: 0.75 mm ² Operating temperature: –25...+90 °C (–13...+194 °F) Ingress protection: IP67 (correctly fitted) Fastening torque: 0.6 Nm	E-Series Start/Stop D84 SSI D84 GB-Series SSI D84 R-Series V SSI D84

NOTICE

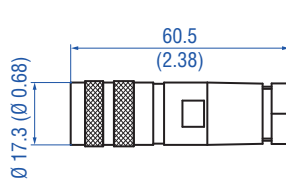
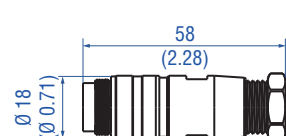
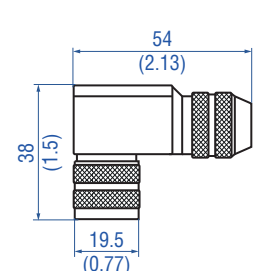
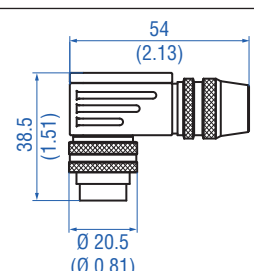
Follow the manufacturer's mounting instructions.

Drawing	Name & part number	Description	Series & output
	M12 A-coded female connector (8 pin), angled Part no. 370 699	Housing: GD-ZnAL Termination: Screw Contact insert: CuZn Cable Ø: 6...8 mm (0.24...0.31 in.) Wire: 0.5 mm ² Operating temperature: -25...+85 °C (-13...+185 °F) Ingress protection: IP67 (correctly fitted) Fastening torque: 0.6 Nm	E-Series Start/Stop D84 SSI D84 GB-Series SSI D84 R-Series V SSI D84
	M12 B-coded female connector (5 pin), straight Part no. 370 766	Material: CuZn Termination: Screw Contact insert: Au Cable Ø: 6...8 mm (0.24...0.31 in.) Wire: 0.75 mm ² Operating temperature: -40...+85 °C (-40...+185 °F) Ingress protection: IP67 (correctly fitted) Fastening torque: 0.5 Nm	R-Series PROFIBUS D53
	M12 B-coded male connector (5 pin), straight Part no. 370 809	Material: CuZn Termination: Screw Contact insert: Au Cable Ø: 6...8 mm (0.24...0.31 in.) Wire: 0.75 mm ² Operating temperature: -40...+85 °C (-40...+185 °F) Ingress protection: IP67 (correctly fitted) Fastening torque: 0.5 Nm	R-Series PROFIBUS D53
	M12 B-coded male connector (4 pin), straight Part no. 560 884	Material: Zinc nickel plated Termination: Insulation-displacement Contact insert: Gold plated Cable Ø: 4.5...8.8 mm (0.18...0.35 in.) Wire: 0.34 mm ² (22 AWG) Operating temperature: -40...+85 °C (-40...+185 °F) Ingress protection: IP65/IP67 (correctly fitted) Number of contacts: 2 pin Fastening torque: 0.6 Nm	R-Series PROFIBUS D53
	M12 B-coded female connector (4 pin), straight Part no. 560 885	Material: Zinc nickel plated Termination: Insulation-displacement Contact insert: Gold plated Cable Ø: 4.5...8.8 mm (0.18...0.35 in.) Wire: 0.34 mm ² (22 AWG) Operating temperature: -40...+85 °C (-40...+185 °F) Ingress protection: IP65/IP67 (correctly fitted) Number of contacts: 2 pin Fastening torque: 0.6 Nm	R-Series PROFIBUS D53
	M12 A-coded male connector (5 pin), straight Part no. 561 665	Housing: GD-Zn, Ni Termination: Screw Contact insert: CuZn Cable Ø: 4...8 mm (0.16...0.31 in.) Wire: 1.5 mm ² Operating temperature: -30...+85 °C (-22...+185 °F) Ingress protection: IP67 (correctly fitted) Fastening torque: 0.6 Nm	E-Series CANbus D34 R-Series CANbus D54

NOTICE

Follow the manufacturer's mounting instructions.

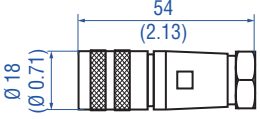
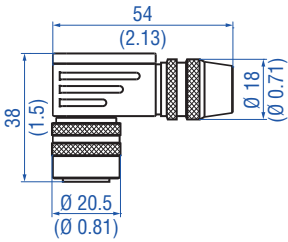
5.4 M16 connectors

Drawing	Name & part number	Description	Series & output
	M16 female connector (6 pin), straight Part no. 370 423	Material: Zinc nickel plated Termination: Solder Cable Ø: 6...8 mm (0.24...0.31 in.) Operating temperature: -40...+100 °C (-40...+212 °F) Ingress protection: IP65/IP67 (correctly fitted) Fastening torque: 0.6 Nm	G-Series V/G-Series Analog D60 Digital D60
			GB-Series Analog D60 R-Series CANbus D60, D62 PROFIBUS D63 R-Series V Analog D60
	M16 male connector (6 pin), straight Part no. 370 427	Material: Zinc nickel plated Termination: Solder Contact insert: Silver plated Cable clamp: PG9 Cable Ø: 6...8 mm (0.24...0.31 in.) Operating temperature: -40...+100 °C (-40...+212 °F) Ingress protection: IP65/IP67 (correctly fitted)	R-Series PROFIBUS D63
	M16 female connector (6 pin), angled Part no. 370 460	Material: Zinc nickel plated Termination: Solder Cable Ø: 6...8 mm (0.24...0.31 in.) Wire: 0.75 mm ² (20 AWG) Operating temperature: -40...+95 °C (-40...+203 °F) Ingress protection: IP67 (correctly fitted) Fastening torque: 0.6 Nm	G-Series V/G-Series Analog D60 Digital D60
			GB-Series Analog D60 R-Series CANbus D60, D62 PROFIBUS D63 R-Series V Analog D60
	M16 male connector (6 pin), angled Part no. 370 621	Material: Brass nickel plated Termination: Solder Contact insert: Silver plated Cable Ø: 6...8 mm (0.24...0.31 in.) Operating temperature: -30...+95 °C (-22...+203 °F) Ingress protection: IP67 (correctly fitted)	R-Series PROFIBUS D63

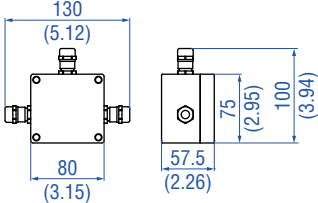

NOTICE

Follow the manufacturer's mounting instructions.

Controlling design dimensions are in millimeters and measurements in () are in inches



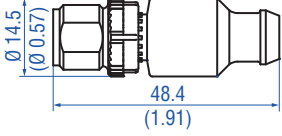
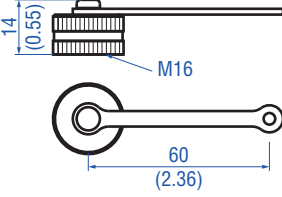
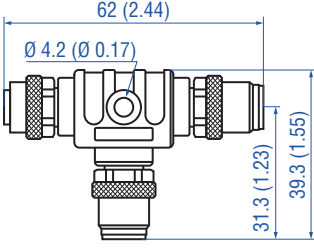

Drawing	Name & part number	Description	Series & output
	M16 female connector (7 pin), straight Part no. 370 624	Material: Zinc nickel plated Termination: Solder Contact insert: Silver plated Cable clamp: PG9 Cable Ø: 6...8 mm (0.24...0.31 in.) Operating temperature: -40...+100 °C (-40...+212 °F) Ingress protection: IP65/IP67 (correctly fitted) Fastening torque: 0.7 Nm	GB-Series
			SSI D70
	M16 female connector (7 pin), angled Part no. 560 779	Material: Zinc nickel plated Termination: Solder Contact insert: Silver plated Cable Ø: 6...8 mm (0.24...0.31 in.) Wire: 0.75 mm ² (20 AWG) Operating temperature: -40...+95 °C (-40...+203 °F) Ingress protection: IP67 (correctly fitted) Fastening torque: 0.5 Nm	GB-Series
			SSI D70

5.5 Connection accessories

Drawing	Name & part number	Description	Series & output
	PROFIBUS filter box, M16 (6 pin) Part no. 252 916	EMC conformal feeding of +24 VDC operating voltage into the Profibus-DP hybrid cable.	R-Series
			PROFIBUS D63
	M12 connector end cap Part no. 370 537	Female connectors M12 should be covered by this protective cap Material: Brass nickel-plated Ingress protection: IP67 (correctly fitted) Fastening torque: 0.39...0.49 Nm	R-Series
			CANbus D54
			PROFIBUS D53
			R-Series V
			EtherCAT® D56, D58
			EtherNet/IP™ D56, D58
POWERLINK D56, D58			
PROFINET D56, D58			

NOTICE

Follow the manufacturer's mounting instructions.

Drawing	Name & part number	Description	Series & output
	Active M16 male bus terminator (6 pin) Part no. 370 620	Material: Zinc nickel plated Contact insert: Silver plated Operating temperature: -40...+75 °C (-40...+167 °F) Ingress protection: IP67 (correctly fitted)	R-Series PROFIBUS D63
	M12 A-coded T connector (5 pin) Part no. 370 691	Selfcuring coupling nut 2 × female connector 1 × male connector Feature: Shielded Ingress protection: IP67 (correctly fitted)	E-Series CANbus D34 R-Series CANbus D54
	Passive M12 A-coded male bus terminator (5 pin) Part no. 370 700	Material: PUR Termination: Screw Contact insert: Au Operating temperature: -25...+85 °C (-13...+121 °F) Ingress protection: IP68 (correctly fitted)	E-Series CANbus D34 R-Series CANbus D54
	M16 connector end cap Part no. 403 290	Material: Brass, nickel plated	G-Series V/G-Series Analog D60 Digital D60 GB-Series SSI D70 R-Series Analog D60 CANbus D60, D62 PROFIBUS D63 SSI D70
	M12 B-coded T connector (5 pin) Part no. 560 887	Material: Zinc nickel plated Termination: Solder Contact insert: Silver plated Installation: Field installable Operating temperature: -30...+90 °C (-22...+130 °F) Ingress protection: IP67 (correctly fitted)	R-Series PROFIBUS D53
	Active M12 B-coded male bus terminator (4 pin) Part no. 560 888	Housing: PUR Termination: Screw Contact insert: Silver plated Operating temperature: -30...+90 °C (-22...+194 °F) Ingress protection: IP68 (correctly fitted)	R-Series PROFIBUS D53

NOTICE



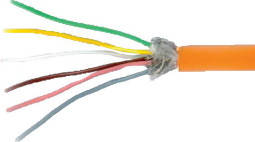
Follow the manufacturer's mounting instructions.

Controlling design dimensions are in millimeters and measurements in () are in inches





6. Cables

A wide range of cable variations is available for Temposonics sensors. In addition to the listed cables with pigtail for self-use, it is also possible to customize the cables for the listed outputs individually with the cable configurator (chapter 7). For some sensor models you can configure the sensor with cable outlet. For this direct mounting of the cable on the sensor, the letter for the designation of the cable outlet in the order code is given in the following list. More information can be found in the corresponding data sheets or operation manuals of the respective sensor.

6.1 Pigtailed cables

Photo	Name & part number	Description	Series & output	
	PVC cable Part no. 530 032	Material: PVC jacket; gray Features: Twisted pair, shielded, flexible Cable Ø: 6 mm (0.23 in.) Cross section: 3 × 2 × 0.14 mm ² Bending radius: 10 × D (fixed installation) Operating temperature: -40...+105 °C (-40...+221 °F)	E-Series	
			Analog	D34
			Start/Stop	D84
			SSI	D84
			G-Series V/G-Series	
			Analog	D60, EXX
			Digital	D60, EXX
			GB-Series	
			Analog	D34, D60
			SSI	D70, D84
R-Series V				
Analog	D34, D60, EXX, RXX			
SSI	D70, D84, EXX, RXX			
	PVC cable Part no. 530 040	Material: PVC jacket; petrol Features: Hybrid cable (PROFIBUS and power supply feed in), flexible Cable Ø: 8 mm (0.31 in.) Cross section: 1 × 2 × 0.65 mm ² 3 × 1 × 0.75 mm ² Bending radius: 5 × D (fixed installation) Operating temperature: -30...+80 °C (-22...+176 °F)	R-Series	
			PROFIBUS	D63
	PUR cable Part no. 530 052	Material: PUR jacket; orange Features: Twisted pair, shielded, highly flexible, halogen free, suitable for drag chains, mostly oil & flame resistant Cable Ø: 6.4 mm (0.25 in.) Cross section: 3 × 2 × 0.19 mm ² Bending radius: 5 × D (fixed installation) Operating temperature: -20...+80 °C (-4...+176 °F)	E-Series	
			Analog	D34
			CANbus	D34
			Start/Stop	D84
			SSI	D84
			G-Series V/G-Series	
			Analog	D60, LXX, HXX
			Digital	D60, LXX, HXX
			GB-Series	
			Analog	D34, D60, HXX
			SSI	D70, D84, HXX
			R-Series	
			CAN	D60, D62
R-Series V				
Analog	D34, D60, HXX, LXX			
SSI	D70, D84, HXX, LXX			

Color of connectors and cable jacket may change. Color codes for the individual wires and technical properties remain unchanged.

Photo	Name & part number	Description	Series & output	
	PVC cable Part no. 530 108	Material: PVC jacket; gray Features: Shielded, flexible, mostly flame resistant Cable Ø: 4.9 mm (0.19 in.) Cross section: 3 × 0.34 mm ² Bending radius: 5 × D (fixed installation) Operating temperature: -30...+80 °C (-22...+176 °F)	R-Series	
			CANbus	D54
			PROFIBUS	D53, AXX
			R-Series V	
			EtherCAT®	D56, D58
			EtherNet/IP™	D56, D58
			POWERLINK	D56, D58
PROFINET	D56, D58			
	PUR cable Part no. 530 109	Material: PUR jacket; violet Features: Highly flexible, halogen free, suitable for drag chains, mostly oil & flame resistant Cable Ø: 8 mm (0.31 in.) Cross section: 1 × 2 × 0.25 mm ² Bending radius: 65 mm Operating temperature: -30...+70 °C (-22...+158 °F)	R-Series	
			PROFIBUS	D53, AXX
	FEP cable Part no. 530 112	Material: FEP jacket; black Features: Twisted pair, shielded, flexible, high thermal resistance, mostly oil & acid resistant Cable Ø: 7.6 mm (0.3 in.) Cross section: 4 × 2 × 0.25 mm ² Bending radius: 8 – 10 × D (fixed installation) Operating temperature: -100...+180 °C (-148...+356 °F)	E-Series	
			Analog	D34, TXX
			Start/Stop	D84, TXX
			CANbus	D34
			SSI	D84, TXX
			GB-Series	
			Analog	D34, D60, TXX
			SSI	D70, D84, TXX
			R-Series	
			CANbus	D54, D60, D62, TXX
			R-Series V	
Analog	D34, D60, TXX			
SSI	D70, D84, TXX			
	Silicone cable Part no. 530 113	Material: Silicone jacket; red Features: Twisted pair, shielded, highly flexible, halogen free, high thermal resistance Cable Ø: 7.2 mm (0.28 in.) Cross section: 3 × 2 × 0.25 mm ² Bending radius: 5 × D (fixed installation) Operating temperature: -50...+180 °C (-58...+356 °F)	GB-Series	
			Analog	D34, D60, VXX
			SSI	D70, D84, VXX
			R-Series V	
			SSI	D70, D84
			E-Series	
			Analog	VXX
			Start/Stop	VXX
SSI	VXX			

Color of connectors and cable jacket may change. Color codes for the individual wires and technical properties remain unchanged.





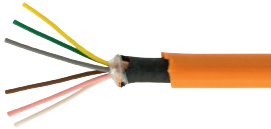
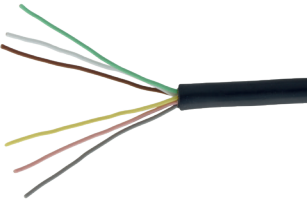









Photo	Name & part number	Description	Series & output	
	PUR cable Part no. 530 116	Material: PUR jacket; gray Features: Shielded, highly flexible, longitudinally watertight, halogen free Cable Ø: 8 mm (0.31 in.) Cross section: 8 × 0.25 mm ² Bending radius: 10 × D Operating temperature: -30...+90 °C (-22...+194 °F)	E-Series	
			Analog	D34
			Start/Stop	D84
			CANbus	D34
			SSI	D84
			GB-Series	
			Analog	D34, D60
			SSI	D70, D84
			R-Series	
			CANbus	D54, D60, D62
R-Series V				
SSI	D70, D84			
	PUR cable Part no. 530 125	Material: PUR jacket; green Features: Cat 5, highly flexible, halogen free, suitable for drag chains, mostly oil & flame resistant Cable Ø: 6.5 mm (0.26 in.) Cross section: 2 × 2 × 0.35 mm ² (22 AWG) Bending radius: 6 × D (fixed installation) Operating temperature: -30...+80 °C (-22...+176 °F) (fixed installation)	R-Series V	
			EtherCAT®	D56, D58, MXX
			EtherNet/IP™	D56, D58, MXX
			POWERLINK	D56, D58, MXX
			PROFINET	D56, D58, MXX
	PUR cable Part no. 530 154	Material: PUR jacket; purple Features: Flexible, halogen free, mostly oil resistant Cable Ø: 7.4 mm (0.29 in.) Cross section: 2 × 2 × 0.34 mm ² Bending radius: 10 × D Operation temperature: -40...+80 °C (-40...+176 °F)	R-Series	
			CANbus	D54, D60, D62
	FEP cable Part no. 530 157	Material: FEP jacket; black Features: Twisted pair, shielded Cable Ø: 6.7 mm (0.26 in.) Cross section: 3 × 2 × 0.14 mm ² Operating temperature: -40...+180 °C (-40...+356 °F)	R-Series V	
			Analog	D34, D60, GXX
			SSI	D70, D84, GXX
			G-Series V	
			Analog	D60, GXX
Digital	D60, GXX			

Photo	Name & part number	Description	Series & output
	PUR cable Part no. 530 175	Material: PUR jacket; orange Features: Flexible, additional EMC protection Cable Ø: 6.5 mm (0.26 in.) Cross section: 6 × 0.14 mm ² Bending radius: 10 × D (fixed installation) Operating temperature: -30...+90 °C (-22...+194 °F)	E-Series
			CANbus D34 SSI D84
	Silicone cable Part no. 530 176	Material: Silicone jacket; black Features: Twisted pair, shielded Cable Ø: 6.3 mm (0.25 in.) Cross section: 3 × 2 × 0.14 mm ² Bending radius: 7 × D (fixed installation) Operating temperature: -50...+150 °C (-58...+302 °F)	GB-Series
			SSI D70, D84
			R-Series
			CANbus D54, D60, D62, PXX
			R-Series V
			Analog D34, D60 SSI D70, D84, BXX, PXX
			R-Series V
			Analog D34, D60, UXX SSI D70, D84, UXX

Color of connectors and cable jacket may change. Color codes for the individual wires and technical properties remain unchanged.

6.2 Cable sets

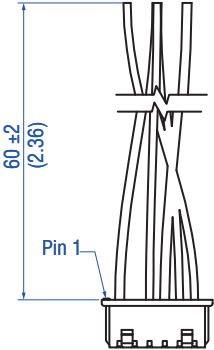
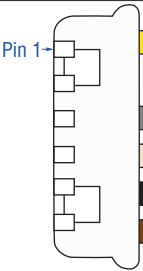





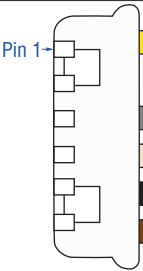




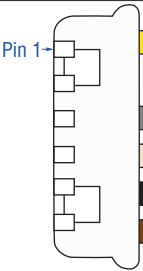












Photo/ Drawing	Name & part number	Description	Series & output	
	Cable with M16 male connector (6 pin), straight – M12 A-coded female connector (5 pin), straight Part no. 254 206	For E-Series with analog output (V01, V03, A01, A02) Cable length: 300 mm (11.81 in.)	E-Series	
			Analog	D34
Wiring				
	M16 male connector (6 pin)	Pin	Pin	M12 A-coded female connector (5 pin)
		5 ↔ 1		
		1 ↔ 2		
		6 ↔ 3		
		3 ↔ 4		
		2 ↔ 5		
		4		
	Cable with M16 male connector (6 pin), straight – M12 A-coded female connector (8 pin), straight Part no. 254 207	For E-Series with Start/Stop output Cable length: 300 mm (11.81 in.)	E-Series	
			Start/Stop	D84
Wiring				
	M16 male connector (6 pin)	Pin	Pin	M12 A-coded female connector (8 pin)
		3 ↔ 1		
		4 ↔ 2		
		2 ↔ 3		
		1 ↔ 4		
		– ↔ 5		
		– ↔ 6		
		5 ↔ 7		
		6 ↔ 8		
	Cable with M16 male connector (6 pin), straight – M12 A-coded female connector (5 pin), straight Part no. 254 270	For E-Series with analog output (A11) Cable length: 300 mm (11.81 in.)	E-Series	
			Analog	D34
Wiring				
	M16 male connector (6 pin)	Pin	Pin	M12 A-coded female connector (5 pin)
		5 ↔ 1		
		1 ↔ 2		
		3 ↔ 3		
		6 ↔ 4		
		– ↔ 5		
		2 ↔ 5		
		4		

Color of connectors and cable jacket may change. Color codes for the individual wires and technical properties remain unchanged.

Photo/Drawing	Name & part number	Description	Series & output																									
	Cable with PicoBlade™ female connector (6 pin), straight – M12 A-coded male connector (5 pin) with flange Part no. 254 256	Operating temperature: -40...+80 °C (-40...+176 °F)	E-Series Analog M11, M31, M61																									
			Wiring <table border="1"> <thead> <tr> <th>PicoBlade™ female connector (6 pin)</th> <th>Pin</th> <th>Pin</th> <th>M12 A-coded male connector (5 pin)</th> </tr> </thead> <tbody> <tr> <td></td> <td>1</td> <td>↔</td> <td>4</td> </tr> <tr> <td></td> <td>-</td> <td>↔</td> <td>-</td> </tr> <tr> <td></td> <td>3</td> <td>↔</td> <td>2</td> </tr> <tr> <td></td> <td>4</td> <td>↔</td> <td>3</td> </tr> <tr> <td></td> <td>5</td> <td>↔</td> <td>5</td> </tr> <tr> <td></td> <td>6</td> <td>↔</td> <td>1</td> </tr> </tbody> </table>	PicoBlade™ female connector (6 pin)	Pin	Pin	M12 A-coded male connector (5 pin)		1	↔	4		-	↔	-		3	↔	2		4	↔	3		5	↔	5	
PicoBlade™ female connector (6 pin)	Pin	Pin	M12 A-coded male connector (5 pin)																									
	1	↔	4																									
	-	↔	-																									
	3	↔	2																									
	4	↔	3																									
	5	↔	5																									
	6	↔	1																									
	Cable with PicoBlade™ female connector (6 pin), straight – M12 A-coded male connector (5 pin) with flange Part no. 254 560	See technical bulletin "Connector system M12 for Sensor E-Series Embedded" (document part no.: 551758) for further information	E-Series Analog M11, M31, M61																									
			Wiring <table border="1"> <thead> <tr> <th>PicoBlade™ female connector (6 pin)</th> <th>Pin</th> <th>Pin</th> <th>M12 A-coded male connector (5 pin)</th> </tr> </thead> <tbody> <tr> <td></td> <td>1</td> <td>↔</td> <td>4</td> </tr> <tr> <td></td> <td>-</td> <td>↔</td> <td>-</td> </tr> <tr> <td></td> <td>3</td> <td>↔</td> <td>2</td> </tr> <tr> <td></td> <td>4</td> <td>↔</td> <td>3</td> </tr> <tr> <td></td> <td>5</td> <td>↔</td> <td>5</td> </tr> <tr> <td></td> <td>6</td> <td>↔</td> <td>1</td> </tr> </tbody> </table>	PicoBlade™ female connector (6 pin)	Pin	Pin	M12 A-coded male connector (5 pin)		1	↔	4		-	↔	-		3	↔	2		4	↔	3		5	↔	5	
PicoBlade™ female connector (6 pin)	Pin	Pin	M12 A-coded male connector (5 pin)																									
	1	↔	4																									
	-	↔	-																									
	3	↔	2																									
	4	↔	3																									
	5	↔	5																									
	6	↔	1																									
	Extension cable, PicoBlade™ female connector (6 pin), straight – PicoBlade™ male connector (6 pin), straight 140 mm Part no. 254 642-1 340 mm Part no. 254 642-2 640 mm Part no. 254 642-3	Operating temperature: -40...+80 °C (-40...+176 °F)	E-Series Analog M11, M31, M61																									
			Wiring <table border="1"> <thead> <tr> <th>PicoBlade™ female connector (6 pin)</th> <th>Pin</th> <th>Pin</th> <th>PicoBlade™ male connector (6 pin)</th> </tr> </thead> <tbody> <tr> <td></td> <td>1</td> <td>↔</td> <td>1</td> </tr> <tr> <td></td> <td>2</td> <td>↔</td> <td>2</td> </tr> <tr> <td></td> <td>3</td> <td>↔</td> <td>3</td> </tr> <tr> <td></td> <td>4</td> <td>↔</td> <td>4</td> </tr> <tr> <td></td> <td>5</td> <td>↔</td> <td>5</td> </tr> <tr> <td></td> <td>6</td> <td>↔</td> <td>6</td> </tr> </tbody> </table>	PicoBlade™ female connector (6 pin)	Pin	Pin	PicoBlade™ male connector (6 pin)		1	↔	1		2	↔	2		3	↔	3		4	↔	4		5	↔	5	
PicoBlade™ female connector (6 pin)	Pin	Pin	PicoBlade™ male connector (6 pin)																									
	1	↔	1																									
	2	↔	2																									
	3	↔	3																									
	4	↔	4																									
	5	↔	5																									
	6	↔	6																									




Controlling design dimensions are in millimeters and measurements in () are in inches

Color of connectors and cable jacket may change. Color codes for the individual wires and technical properties remain unchanged.

























































Photo/Drawing	Name & part number	Description	Series & output																					
	Extension cable, PicoBlade™ male connector (6 pin), straight – pigtail Part no. 254 266	Operating temperature: -40...+80 °C (-40...+176 °F)	E-Series Analog M11, M31, M61																					
		Wiring <table border="1"> <thead> <tr> <th>PicoBlade™ male connector (6 pin)</th> <th>Pin</th> <th>Color</th> <th>Wires</th> </tr> </thead> <tbody> <tr> <td rowspan="6">  </td> <td>1</td> <td>↔ YE</td> <td></td> </tr> <tr> <td>-</td> <td>↔ -</td> <td></td> </tr> <tr> <td>3</td> <td>↔ GY</td> <td></td> </tr> <tr> <td>4</td> <td>↔ WH</td> <td></td> </tr> <tr> <td>5</td> <td>↔ BK</td> <td></td> </tr> <tr> <td>6</td> <td>↔ BN</td> <td></td> </tr> </tbody> </table>	PicoBlade™ male connector (6 pin)	Pin	Color	Wires		1	↔ YE		-	↔ -		3	↔ GY		4	↔ WH		5	↔ BK		6	↔ BN
PicoBlade™ male connector (6 pin)	Pin	Color	Wires																					
	1	↔ YE																						
	-	↔ -																						
	3	↔ GY																						
	4	↔ WH																						
	5	↔ BK																						
	6	↔ BN																						
	Cable with M12 A-coded female connector (5 pin), straight – pigtail Part no. 370 673	Material: PUR jacket; black Feature: Shielded Cable length: 5 m (16.4 ft) Ingress protection: IP67 (correctly fitted) Operating temperature: -25...+80 °C (-13...+176 °F)	E-Series Analog D34 CANbus D34 IO-Link D44 R-Series V Analog D34 EtherCAT® D58 EtherNet/IP™ D58 POWERLINK D58 PROFINET D58																					
		Wiring <table border="1"> <thead> <tr> <th>Wires</th> <th>Color</th> <th>Pin</th> <th>M12 A-coded female connector (5 pin)</th> </tr> </thead> <tbody> <tr> <td rowspan="5">  </td> <td>BN</td> <td>↔ 1</td> <td rowspan="5">  </td> </tr> <tr> <td>WH</td> <td>↔ 2</td> </tr> <tr> <td>BU</td> <td>↔ 3</td> </tr> <tr> <td>BK</td> <td>↔ 4</td> </tr> <tr> <td>GY</td> <td>↔ 5</td> </tr> </tbody> </table>	Wires	Color	Pin	M12 A-coded female connector (5 pin)		BN	↔ 1		WH	↔ 2	BU	↔ 3	BK	↔ 4	GY	↔ 5						
Wires	Color	Pin	M12 A-coded female connector (5 pin)																					
	BN	↔ 1																						
	WH	↔ 2																						
	BU	↔ 3																						
	BK	↔ 4																						
	GY	↔ 5																						

Controlling design dimensions are in millimeters and measurements in () are in inches



















Color of connectors and cable jacket may change. Color codes for the individual wires and technical properties remain unchanged.

Photo/ Drawing	Name & part number	Description	Series & output		
	Cable with M12 A-coded female connector (5 pin), angled – pigtail Part no. 370 675	Material: PUR jacket; black Feature: Shielded Cable length: 5 m (16.4 ft) Ingress protection: IP67 (correctly fitted) Operating temperature: -25...+80 °C (-13...+176 °F)	E-Series		
			Analog	D34	
			CANbus	D34	
			IO-Link	D44	
			R-Series V		
			Analog	D34	
			EtherCAT®	D58	
			EtherNet/IP™	D58	
			POWERLINK	D58	
			PROFINET	D58	
Wiring					
				M12 A-coded female connector (5 pin)	
	BN WH BU BK GY	↔ ↔ ↔ ↔ ↔	1 2 3 4 5		

Color of connectors and cable jacket may change. Color codes for the individual wires and technical properties remain unchanged.

Photo/Drawing	Name & part number	Description	Series & output																													
	Cable with M12 A-coded female connector (8 pin), straight – pigtail Part no. 370 789	Material: PUR jacket; orange Features: Twisted pair, shielded Cable length: 5 m (16.4 ft) Ingress protection: IP67/IP69K (correctly fitted) Operating temperature: -25...+80 °C (-13...+176 °F)	E-Series SSI D84 Start/Stop D84																													
			R-Series V SSI D84																													
Wiring																																
<table border="1"> <thead> <tr> <th>Wires</th> <th>Color</th> <th>Pin</th> <th>M12 A-coded female connector (8 pin)</th> </tr> </thead> <tbody> <tr> <td></td> <td>YE</td> <td>↔ 1</td> <td rowspan="8">  </td> </tr> <tr> <td></td> <td>GN</td> <td>↔ 2</td> </tr> <tr> <td></td> <td>PK</td> <td>↔ 3</td> </tr> <tr> <td></td> <td>GY</td> <td>↔ 4</td> </tr> <tr> <td></td> <td>-</td> <td>↔ 5</td> </tr> <tr> <td></td> <td>-</td> <td>↔ 6</td> </tr> <tr> <td></td> <td>BN</td> <td>↔ 7</td> </tr> <tr> <td></td> <td>WH</td> <td>↔ 8</td> </tr> </tbody> </table>				Wires	Color	Pin	M12 A-coded female connector (8 pin)		YE	↔ 1			GN	↔ 2		PK	↔ 3		GY	↔ 4		-	↔ 5		-	↔ 6		BN	↔ 7		WH	↔ 8
Wires	Color	Pin	M12 A-coded female connector (8 pin)																													
	YE	↔ 1																														
	GN	↔ 2																														
	PK	↔ 3																														
	GY	↔ 4																														
	-	↔ 5																														
	-	↔ 6																														
	BN	↔ 7																														
	WH	↔ 8																														
	Cable with M12 A-coded female connector (8 pin), angled – pigtail Part no. 370 821	Material: PUR jacket; orange Features: Twisted pair, shielded Cable length: 5 m (16.4 ft) Ingress protection: IP67/IP69K (correctly fitted) Operating temperature: -25...+80 °C (-13...+176 °F)	E-Series SSI D84 Start/Stop D84																													
			R-Series V SSI D84																													
Wiring																																
<table border="1"> <thead> <tr> <th>Wires</th> <th>Color</th> <th>Pin</th> <th>M12 A-coded female connector (8 pin)</th> </tr> </thead> <tbody> <tr> <td></td> <td>YE</td> <td>↔ 1</td> <td rowspan="8">  </td> </tr> <tr> <td></td> <td>GN</td> <td>↔ 2</td> </tr> <tr> <td></td> <td>PK</td> <td>↔ 3</td> </tr> <tr> <td></td> <td>GY</td> <td>↔ 4</td> </tr> <tr> <td></td> <td>-</td> <td>↔ 5</td> </tr> <tr> <td></td> <td>-</td> <td>↔ 6</td> </tr> <tr> <td></td> <td>BN</td> <td>↔ 7</td> </tr> <tr> <td></td> <td>WH</td> <td>↔ 8</td> </tr> </tbody> </table>				Wires	Color	Pin	M12 A-coded female connector (8 pin)		YE	↔ 1			GN	↔ 2		PK	↔ 3		GY	↔ 4		-	↔ 5		-	↔ 6		BN	↔ 7		WH	↔ 8
Wires	Color	Pin	M12 A-coded female connector (8 pin)																													
	YE	↔ 1																														
	GN	↔ 2																														
	PK	↔ 3																														
	GY	↔ 4																														
	-	↔ 5																														
	-	↔ 6																														
	BN	↔ 7																														
	WH	↔ 8																														

Color of connectors and cable jacket may change. Color codes for the individual wires and technical properties remain unchanged.

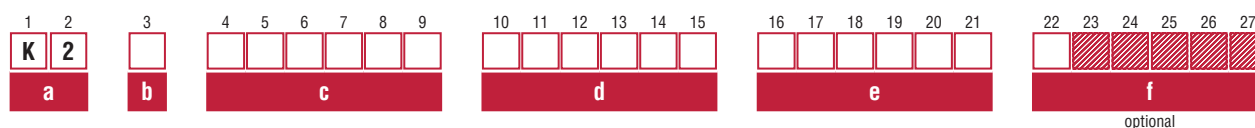
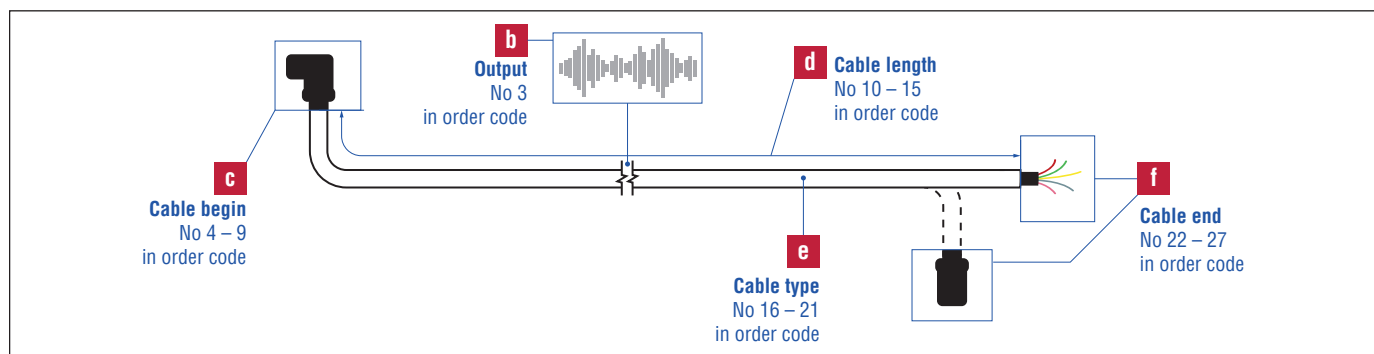
Photo/Drawing	Name & part number	Description	Series & output																
	Cable with M12 D-coded male connector (4 pin), straight – M12 D-coded, male connector (4 pin), straight Part no. 530 064	Material: PUR jacket; green Feature: Cat 5e Cable length: 5 m (16.4 ft) Cable Ø: 6.5 mm (0.26 in.) Ingress protection: IP65, IP67, IP68 (correctly fitted) Operating temperature: -30...+70 °C (-22...+158 °F)	R-Series V																
			EtherCAT® D56, D58																
			EtherNet/IP™ D56, D58																
			POWERLINK D56, D58																
	Cable with M12 D-coded male connector (4 pin), straight – RJ45 male connector, straight Part no. 530 065	Material: PUR jacket; green Feature: Cat 5e Cable length: 5 m (16.4 ft) Cable Ø: 6.5 mm (0.26 in.) Ingress protection M12 connector: IP67 (correctly fitted) Ingress protection RJ45 connector: IP20 (correctly fitted) Operating temperature: -30...+70 °C (-22...+158 °F)	R-Series V																
			EtherCAT® D56, D58																
			EtherNet/IP™ D56, D58																
			POWERLINK D56, D58																
	Cable with M8 female connector (4 pin), straight – pigtail Part no. 530 066 (5 m (16.4 ft)) Part no. 530 096 (10 m (32.8 ft)) Part no. 530 093 (15 m (49.2 ft))	Material: PUR jacket; gray Feature: Shielded Cable Ø: 5 mm (0.2 in.) Operating temperature: -40...+90 °C (-40...+194 °F)	R-Series																
			PROFIBUS D53, AXX																
			R-Series V																
			EtherCAT® D56																
			EtherNet/IP™ D56																
			POWERLINK D56																
			PROFINET D56																
Wiring																			
	<table border="1"> <thead> <tr> <th>Wires</th> <th>Color</th> <th>Pin</th> <th>M8 female connector (4 pin)</th> </tr> </thead> <tbody> <tr> <td></td> <td>BN</td> <td>↔ 1</td> <td rowspan="4">  </td> </tr> <tr> <td></td> <td>WH</td> <td>↔ 2</td> </tr> <tr> <td></td> <td>BU</td> <td>↔ 3</td> </tr> <tr> <td></td> <td>BK</td> <td>↔ 4</td> </tr> </tbody> </table>	Wires	Color	Pin	M8 female connector (4 pin)		BN	↔ 1			WH	↔ 2		BU	↔ 3		BK	↔ 4	
Wires	Color	Pin	M8 female connector (4 pin)																
	BN	↔ 1																	
	WH	↔ 2																	
	BU	↔ 3																	
	BK	↔ 4																	

Color of connectors and cable jacket may change. Color codes for the individual wires and technical properties remain unchanged.

7. Cable configurator

7.1 Structure

You can customize the cables via the cable configurator. Depending on the structure shown, the output, cable begin, cable length, cable type and cable end must be selected. The following pages list the outputs, the corresponding device plugs and sockets as well as cable types.



a	Name
K 2	Cable configurator

b	Output
A	Analog
C	CANbus
E	EtherCAT®, EtherNet/IP™, POWERLINK, PROFINET
P	PROFIBUS
R	Start/Stop
S	SSI
Z	Power supply (CANbus, EtherCAT®, EtherNet/IP™, POWERLINK, PROFIBUS, PROFINET)

c	Cable begin <i>see chapter 5 for detailed information</i>
X X X X X X	<ul style="list-style-type: none"> • M8/M12/M16 • Male/female • Straight/angled

d	Cable length*
X X X X C M	0030...9990 cm
0 X X X F T	0001...0327 ft.


e	Cable type <i>see chapter 6 for detailed information</i>
X X X X X X	<ul style="list-style-type: none"> • FEP cable • PUR cable • PVC cable • Silicone cable

f	Cable end
0	Open cable end
Optional - instead of open cable end <i>(see chapter 5 for detailed information)</i>	
X X X X X X	<ul style="list-style-type: none"> • M12/M16 connector • Male/female • Straight/angled

* / Length tolerance: -0/+1 % (minimum -0/+10 cm (0.3 ft.))

7.2 Analog

Example: 100 cm PUR cable (530 052) with M16 straight female connector (370 423) and open cable end for R-Series V Analog (D60):
K2-A-370423-0100CM-530052-0



a	Name
K 2	Cable configurator

b	Output
A	Analog

c	Cable begin
M12 connector <i>see chapter 5.3 for detailed information</i>	
3 7 0 6 7 7	Straight Female E-Series D34 GB-Series D34 R-Series V D34
3 7 0 6 7 8	Angled Female E-Series D34 GB-Series D34 R-Series V D34
M16 connector <i>see chapter 5.4 for detailed information</i>	
3 7 0 4 2 3	Straight Female G-Series V D60 G-Series D60 GB-Series D60 R-Series V D60
3 7 0 4 6 0	Angled Female G-Series V D60 G-Series D60 GB-Series D60 R-Series V D60

d	Cable length*
X X X X C M	0030...9990 cm
0 X X X F T	0001...0327 ft.

e	Cable type <i>see chapter 6 for detailed information</i>
5 3 0 0 3 2	PVC cable
5 3 0 0 5 2	PUR cable
5 3 0 1 1 2	FEP cable
5 3 0 1 1 6	PUR cable
5 3 0 1 5 7	FEP cable
5 3 0 1 7 6	Silicon cable

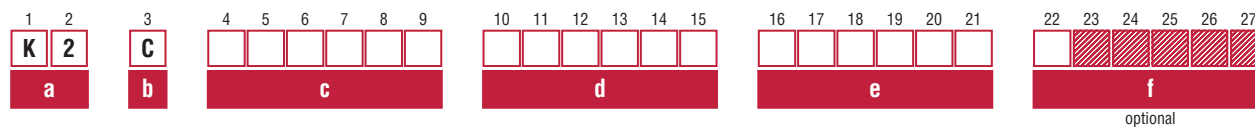
f	Cable end
0	Open cable end

Wiring							
Cable 530 032	Cable 530 052	Cable 530 112	Cable 530 116	Cable 530 157	Cable 530 176	M12 female connector	M16 female connector
Color	Color	Color	Color	Color	Color	Pin	Pin
GY	GY	GY	GY	GY	GY	2	1
PK	PK	PK	PK	PK	PK	5	2
YE	YE	YE	YE	YE	YE	4	3
GN	GN	GN	GN	GN	GN	Not connected	4
BN	BN	BN	BN	BN	BN	1	5
WH	WH	WH	WH	WH	WH	3	6
		BU	BU			Not connected	Not connected
		RD	RD			Not connected	Not connected

* / Length tolerance: -0/+1 % (minimum -0/+10 cm (0.3 ft.))

7.3 CANbus

Example: 100 cm FEP cable (530 112) with M12 straight female connector (370 423) and open cable end for R-Series CANbus (D60):
K2-C-370423-0100CM-530112-0



a	Name
K 2	Cable configurator

b	Output
C	CANbus

c	Cable begin
M12 connector <i>see chapter 5.3 for detailed information</i>	
3 7 0 6 7 7	Straight Female R-Series D54
3 7 0 6 7 8	Angled Female R-Series D54
M16 connector <i>see chapter 5.4 for detailed information</i>	
3 7 0 4 2 3	Straight Female R-Series D60, D62
3 7 0 4 6 0	Angled Female R-Series D60, D62

d	Cable length*
X X X X C M	0030...9990 cm
0 X X X F T	0001...0327 ft.

e	Cable type <i>see chapter 6 for detailed information</i>
5 3 0 0 5 2	PUR cable
5 3 0 1 1 2	FEP cable
5 3 0 1 1 6	PUR cable
5 3 0 1 7 5	PUR cable

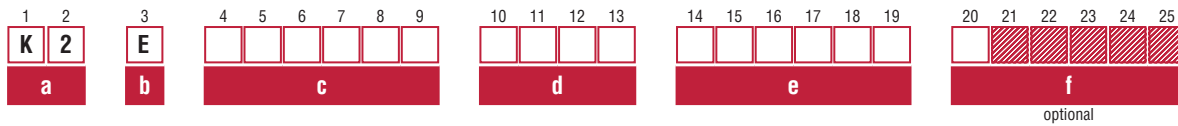
f	Cable end
0	Open cable end
Optional – instead of open cable end	
M16 (<i>see chapter 5.4 for detailed information</i>)	
3 7 0 4 2 3	Straight Female R-Series D60, D62
3 7 0 4 6 0	Angled Female R-Series D60, D62

Wiring					
Cable 530 052	Cable 530 112	Cable 530 116	Cable 530 175	M12 female connector	M16 female connector
Color	Color	Color	Color	Pin	Pin
GY	GY	GY	GY	5	1
PK	PK	PK	PK	4	2
YE	YE	YE	YE	Not connected	Not connected
GN	GN	GN	GN	Not connected	Not connected
BN	BN	BN	BN	2	5
WH	WH	WH	WH	3	6
	BU	BU		Not connected	Not connected
	RD	RD		Not connected	Not connected

* / Length tolerance: -0/+1 % (minimum -0/+10 cm (0.3 ft.))

7.4 EtherCAT®/EtherNet/IP™/POWERLINK/PROFINET

Example: 100 cm PUR cable (530 125) with M12 straight male connector (370 523) and open cable end for R-Series V PROFINET (D58): K2-E-370523-0100CM-530125-0



a	Name
K 2	Cable configurator

b	Output
E	EtherCAT®/EtherNet/IP™/POWERLINK/PROFINET

c	Cable begin
M12 connector <i>see chapter 5.3 for detailed information</i>	
3 7 0 5 2 3	Straight Male R-Series V EtherCAT® D56 R-Series V EtherCAT® D58 R-Series V EtherCAT® MXX R-Series V EtherNet/IP™ D56 R-Series V EtherNet/IP™ D58 R-Series V EtherNet/IP™ MXX R-Series V POWERLINK D56 R-Series V POWERLINK D58 R-Series V POWERLINK MXX R-Series V PROFINET D56 R-Series V PROFINET D58 R-Series V PROFINET MXX

d	Cable length*
X X X X C M	0030...9990 cm
0 X X X F T	0001...0327 ft.

e	Cable type <i>see chapter 6 for detailed information</i>
5 3 0 1 2 5	PUR cable

f	Cable end
0	Open cable end

Optional – instead of open cable end

M12 connector *see chapter 5.3 for detailed information*

3 7 0 5 2 3	Straight Male R-Series V EtherCAT® D56 R-Series V EtherCAT® D58 R-Series V EtherCAT® MXX R-Series V EtherNet/IP™ D56 R-Series V EtherNet/IP™ D58 R-Series V EtherNet/IP™ MXX R-Series V POWERLINK D56 R-Series V POWERLINK D58 R-Series V POWERLINK MXX R-Series V PROFINET D56 R-Series V PROFINET D58 R-Series V PROFINET MXX
-------------	--

RJ45

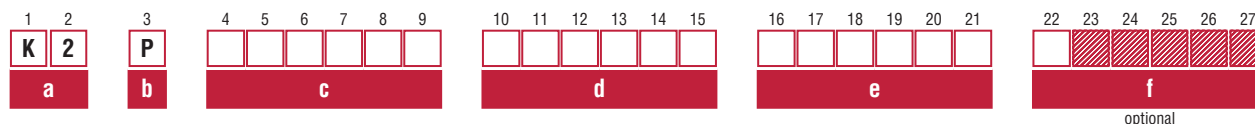
3 7 0 6 4 9	Straight Male R-Series V EtherCAT® D56 R-Series V EtherCAT® D58 R-Series V EtherCAT® MXX R-Series V EtherNet/IP™ D56 R-Series V EtherNet/IP™ D58 R-Series V EtherNet/IP™ MXX R-Series V POWERLINK D56 R-Series V POWERLINK D58 R-Series V POWERLINK MXX R-Series V PROFINET D56 R-Series V PROFINET D58 R-Series V PROFINET MXX
-------------	--

Wiring	
Cable 530 125	M12 male connector
Color	Pin
● YE	1
● WH	2
● OG	3
● BU	4

*/ Length tolerance: -0/+1 % (minimum -0/+10 cm (0.3 ft.))

7.5 PROFIBUS

Example: 100 cm PVC cable (530 040) with M16 straight male connector (370 427) and open cable end for R-Series PROFIBUS (D63):
K2-P-370427-0100CM-530040-0



a	Name
K 2	Cable configurator

b	Output
P	PROFIBUS

c	Cable begin
M12 connector <i>see chapter 5.3 for detailed information</i>	
5 6 0 8 8 4	Straight Male R-Series D53
3 7 0 5 1 5	Angled Male R-Series D53
5 6 0 8 8 5	Straight Female R-Series D53
3 7 0 5 1 4	Angled Female R-Series D53
M16 connector <i>see chapter 5.4 for detailed information</i>	
3 7 0 4 2 7	Straight Male R-Series D63
3 7 0 6 2 1	Angled Male R-Series D63
3 7 0 4 2 3	Straight Female R-Series D63
3 7 0 4 6 0	Angled Female R-Series D63

d	Cable length*
X X X X C M	0030...9990 cm
0 X X X F T	0001...0327 ft.

e	Cable type <i>see chapter 6 for detailed information</i>
for M12 connectors (D53)	
5 3 0 1 0 9	PUR cable
for M16 connectors (D63)	
5 3 0 0 4 0	PVC cable


f	Cable end
0	Open cable end
Optional - instead of open cable end <i>(see chapter 5.3 for detailed information)</i>	
M12 connector <i>see chapter 5.3 for detailed information</i>	
5 6 0 8 8 4	Straight Male R-Series D53
5 6 0 8 8 5	Straight Female R-Series D53
M16 connector <i>see chapter 5.4 for detailed information</i>	
3 7 0 4 2 7	Straight Male R-Series D63
3 7 0 4 2 3	Angled Male R-Series D63

Wiring			
Cable 530 040	M12 female/male connector	Cable 530 109	M16 female/male connector
Color	Pin	Color	Pin
GN	2	GN	1
RD	4	RD	2
BK	Not connected		5
BU	Not connected		6
YE	Not connected		Not connected

* / Length tolerance: -0/+1 % (minimum -0/+10 cm (0.3 ft.))

7.6 Start/Stop

Example: 100 cm PUR cable (530 052) with M12 straight female connector (370 694) and open cable end for E-Series Start/Stop (D84):
K2-R-370694-0100CM-530052-0



a	Name
K	2
Cable configurator	

b	Output
R	Start/Stop

c	Cable begin								
M12 connector see chapter 5.3 for detailed information									
3	7	0	6	9	4	Straight	Female	E-Series	D84
3	7	0	6	9	9	Angled	Female	E-Series	D84
M16 connector see chapter 5.4 for detailed information									
3	7	0	4	2	3	Straight	Female	G-Series V	D60
3	7	0	4	6	0	Angled	Female	G-Series V	D60

d	Cable length*					
X	X	X	X	C	M	0030...9990 cm
0	X	X	X	F	T	0001...0327 ft.

e	Cable type see chapter 6 for detailed information					
5	3	0	0	3	2	PVC cable
5	3	0	0	5	2	PUR cable
5	3	0	1	1	2	FEP cable
5	3	0	1	1	6	PUR cable

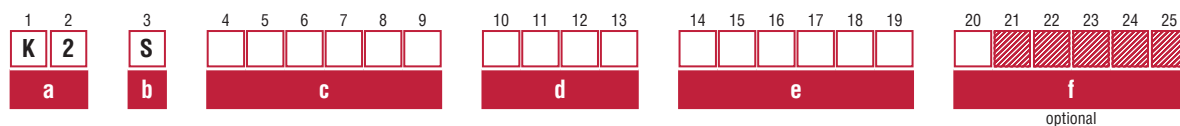
f	Cable end
0	Open cable end

Wiring					
Cable 530 032	Cable 530 052	Cable 530 112	Cable 530 116	M12 female connector	M16 female connector
Color	Color	Color	Color	Pin	Pin
GY	GY	GY	GY	4	1
PK	PK	PK	PK	3	2
YE	YE	YE	YE	1	3
GN	GN	GN	GN	2	4
BN	BN	BN	BN	7	5
WH	WH	WH	WH	8	6
		BU	BU	Not connected	Not connected
		RD	RD	Not connected	Not connected

*/ Length tolerance: -0/+1 % (minimum -0/+10 cm (0.3 ft.))

7.7 SSI

Example: 100 cm PVC cable (530 032) with M16 straight female connector (370 624) and open cable end for R-Series V SSI (D70):
K2-S-370624-0100CM-530032-0



a	Name
K 2	Cable configurator

b	Output
S	SSI

c	Cable begin
M12 connector see chapter 5.3 for detailed information	
3 7 0 6 9 4	Straight Female E-Series D84 GB-Series D84 R-Series V D84
3 7 0 6 9 9	Angled Female E-Series D84 GB-Series D84 R-Series V D84

M16 connector see chapter 5.4 for detailed information	
3 7 0 6 2 4	Straight Female R-Series V D70
5 6 0 7 7 9	Angled Female R-Series V D70

d	Cable length*
X X X X C M	0030...9990 cm
0 X X X F T	0001...0327 ft.

e	Cable type	see chapter 6 for detailed information
5 3 0 0 3 2	PVC cable	
5 3 0 0 5 2	PUR cable	
5 3 0 1 1 2	FEP cable	
5 3 0 1 1 6	PUR cable	
5 3 0 1 5 7	FEP cable	
5 3 0 1 7 5	PUR cable	
5 3 0 1 7 6	Silicon cable	


f	Cable end
0	Open cable end
Optional – instead of open cable end	
M16 (D70) (see chapter 5.4 for detailed information)	
3 7 0 6 2 5	Straight Male R-Series V D70

Wiring								
Cable 530 032	Cable 530 052	Cable 530 112	Cable 530 116	Cable 530 157	Cable 530 175	Cable 530 176	M12 female connector	M16 female/male connector
Color	Color	Color	Color	Color	Color	Color	Pin	Pin
GY	GY	GY	GY	GY	GY	GY	4	1
PK	PK	PK	PK	PK	PK	PK	3	2
YE	YE	YE	YE	YE	YE	YE	1	3
GN	GN	GN	GN	GN	GN	GN	2	4
BN	BN	BN	BN	BN	BN	BN	7	5
WH	WH	WH	WH	WH	WH	WH	8	6
		BU	BU				Not connected	Not connected
		RD	RD				Not connected	Not connected

* / Length tolerance: -0/+1 % (minimum -0/+10 cm (0.3 ft.))

7.8 Power supply for CANbus/EtherCAT®/EtherNet/IP™/POWERLINK/PROFIBUS/PROFINET

Example: 100 cm PVC cable (530 108) with M8 straight female connector (370 504) and open cable end for power supply of R-Series V POWERLINK (D56): K2-Z-370504-0100CM-530108-0



a	Name
K 2	Cable configurator

b	Output
Z	Power supply

c	Cable begin
M8 connector <i>see chapter 5.2 for detailed information</i>	
3 7 0 5 0 4	Straight Female R-Series CANbus D54 R-Series PROFIBUS D53 R-Series PROFIBUS AXX R-Series V EtherCAT® D56 R-Series V EtherNet/IP™ D56 R-Series V POWERLINK D56 R-Series V PROFINET D56
5 6 0 8 8 6	Angled Female R-Series CANbus D54 R-Series PROFIBUS D53 R-Series PROFIBUS AXX R-Series V EtherCAT® D56 R-Series V EtherNet/IP™ D56 R-Series V POWERLINK D56 R-Series V PROFINET D56
M12 connector <i>see chapter 5.3 for detailed information</i>	
3 7 0 6 7 7	Straight Female R-Series V EtherNet/IP™ D58 R-Series V EtherCAT® D58 R-Series V POWERLINK D58 R-Series V PROFINET D58

d	Cable length*
X X X X C M	0030...9990 cm
0 X X X F T	0001...0327 ft.

e	Cable type <i>see chapter 6 for detailed information</i>
5 3 0 1 0 8	PVC cable

f	Cable end
0	Open cable end

Wiring		
Cable 530 108	M8 female connector	M12 female connector
Color	Pin	Pin
BN	1	1
	2	2
WH	3	3
	4	6
GN	Not connected	Not connected

* / Length tolerance: -0/+1 % (minimum -0/+10 cm (0.3 ft.))

8. Programming tools




Photo	Name & part number	Description	Series & output
	CANopen address programmer with straight connector Part no. 252 382-D62 CANopen address programmer with angled connector Part no. 252 382-D62A	Used for setting the node address to Temposonics® sensors with CANopen interface. The setup of the node address is normally done by the CANbus standard LMT-Service. Since some master systems do not support this standard, or the customer controller system can not handle it, this service tool can be used for the direct setup of the sensor. All you need for using the programmer is a +24 VDC power supply to the sensor. The programming tool will be supplied by the Temposonics® position sensor.	R-Series CANbus
	Hand programmer for analog output Part no. 253 124	Easy teach-in-setups of stroke length and direction on desired zero/span positions. For sensors with 1 magnet.	E-Series ET Analog GB-Series Analog R-Series V Analog
	Programming kit Part no. 253 134-1 (EU) Part no. 253 309-1 (US)	Kit includes: 1 × interface converter box, 1 × power supply 1 × cable (60 cm) with M16 female connector (6 pin), straight – D-sub female connector (9 pin), straight 1 × cable (60 cm) with 3 × terminal clamp – D-sub female connector (9 pin), straight 1 × USB cable For sensors with 1 or 2 magnets. Software is available at: www.temposonics.com	E-Series ET Analog T-Series Analog (standard)
	Programming kit Part no. 253 135-1 (EU) Part no. 253 310-1 (US)	Kit includes: 1 × interface converter box, 1 × power supply 1 × cable (60 cm) with M16 female connector (7 pin), straight – D-sub female connector (9 pin), straight 1 × cable (60 cm) with 6 × terminal clamp – D-sub female connector (9 pin), straight 1 × USB cable Software is available at: www.temposonics.com	E-Series ET SSI T-Series SSI





Photo	Name & part number	Description	Series & output
	Programming kit Part no. 253 145-1	Kit includes: 1 × interface converter box 1 × power supply 1 × cable (60 cm) with M16 female connector (6 pin), straight & 2 × banana connector – D-sub female connector (9 pin), straight 1 × cable (60 cm) with 4 × terminal clamp – D-sub female connector (9 pin), straight 1 × USB cable Software is available at: www.temposonics.com	G-Series Analog
	Cabinet programmer for analog output Part no. 253 408	Features snap-in mounting on standard DIN rail (35 mm). This programmer can be permanently mounted in a control cabinet and includes a program/run switch. For sensors with 1 magnet.	E-Series ET Analog GB-Series Analog R-Series V Analog T-Series Analog (standard)
	Hand programmer for analog output Part no. 253 853	Easy teach-in-setups of stroke length and direction on desired zero/span positions. For sensors with 1 magnet.	G-Series Analog
	Programming kit Part no. 254 555	Kit includes: 1 × interface converter box 1 × power supply 1 × cable (60 cm) with M12 female connector (5 pin), straight – D-sub female connector (9 pin), straight 1 × cable (60 cm) with M16 female connector (6 pin), straight – D-sub female connector (9 pin), straight 1 × cable (60 cm) with 3 × terminal clamp – D-sub female connector (9 pin), straight 1 × USB cable Software is available at: www.temposonics.com	GB-Series Analog




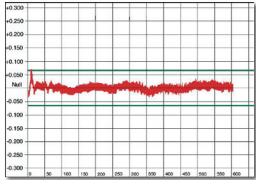

Photo	Name & part number	Description	Series & output
	Programming kit Part no. 254 590	Kit includes: 1 × interface converter box 1 × power supply 1 × cable (60 cm) with M12 female connector (8 pin), straight – D-sub female connector (9 pin), straight 1 × cable (60 cm) with M16 female connector (7 pin), straight – D-sub female connector (9 pin), straight 1 × cable (60 cm) with 6 × terminal clamp – D-sub female connector (9 pin), straight 1 × USB cable Software is available at: www.temposonics.com	GB-Series SSI
	PROFIBUS node address programmer Part no. 280 640	Used for setting the slave address to Temposonics® sensors with PROFIBUS-DP interface. The setup of slave address is normally done by the PROFIBUS standard service SetSlaveAddress. Since some master systems do not support this standard, or the customer controller system can not handle it, this service tool can be used for the direct setup of the sensor. The programmer and the sensor will be supplied by the included power supply.	R-Series PROFIBUS
	PROFIBUS master simulator Part no. 401 727 PROFIBUS adapter cable for connection type D53 Part no. 252 383 PROFIBUS adapter cable for connection type D63 Part no. 401 726	The master simulator can be used to check the sensors functions and to change the slave address. The magnet positions can be read out and the diagnostic data as well.	R-Series PROFIBUS
	Linearity diagram Part no. 625 096	DIN A4 printout with sensor data and graphic with the linearity gradient. This gradient can be used to choose a special linear segment or for linearity correction in sections.	R-Series CANbus PROFIBUS R-Series V Analog EtherCAT® EtherNet/IP™ POWERLINK PROFINET SSI

Photo	Name & part number	Description	Series & output								
 <p>The image shows a rectangular industrial indicator with a black plastic housing. The front panel features a multi-color LCD display showing the number '1.2345' in orange. Below the display are several small, unlabeled buttons. The 'motrona' logo is visible at the bottom left of the front panel. The top of the device has a white label with technical specifications.</p>	<p>IX350/AC SSI indicator Part no. IX350/AC</p>	<p>Indicator with resistive touch panel and multi-color graphic display. Visualization of plain text, symbols and units. Housing: 96 mm × 48 mm × 116 mm For additional information see: www.motrona.com</p>	<table border="1"> <tr> <td>E-Series</td> </tr> <tr> <td>SSI</td> </tr> <tr> <td>GB-Series</td> </tr> <tr> <td>SSI</td> </tr> <tr> <td>R-Series V</td> </tr> <tr> <td>SSI</td> </tr> <tr> <td>T-Series</td> </tr> <tr> <td>SSI</td> </tr> </table>	E-Series	SSI	GB-Series	SSI	R-Series V	SSI	T-Series	SSI
E-Series											
SSI											
GB-Series											
SSI											
R-Series V											
SSI											
T-Series											
SSI											

9. TempoLink® smart assistant for R-Series V and G-Series V

YOUR SMART ASSISTANT

The TempoLink® smart assistant is an accessory for the R-Series V and G-Series V sensors family. It supports the setup of the sensor in the application as well as providing additional status information for sensor diagnostics.

ORDER CODE

1	2	3	4	5	6	7	8
T	L		0				
a		b	c	d			

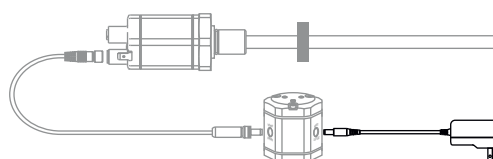
a	Type
T L	TempoLink® smart assistant kit

b	Power supply
1	Plug-in power supply with plug adapters (AU, CCC, EU, UK, US)
2	Cable for insertion in existing sensor power supply with sensor mating connector and barrel connector (for connection type D56)
3	Cable for insertion in existing sensor power supply with sensor mating connector and barrel connector (for connection type D58)
4	Barrel connector with pig-tail for connection to an existing power supply

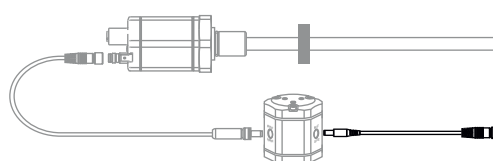
c	Option
0	No options

d	Adapter cables for connection to R- or G-Series V
E M 0 8	Cable with M8 female connector (4 pin) for connection type D56 (EtherCAT®/EtherNet/IP™/POWERLINK/PROFINET) (part no. 254 887-1)
E M 1 2	Cable with M12 female connector (4 pin) for connection type D58 (EtherCAT®/EtherNet/IP™/POWERLINK/PROFINET) (part no. 254 897-1)
S D 7 0	Cable with M16 female connector (7 pin) for connection type D70 (SSI) (part no. 254 990-1)
S D 8 4	Cable with M12 female connector (8 pin) for connection type D84 (SSI) (part no. 255 204-1)
A D 3 4	Cable with M12 female connector (5 pin) for connection type D34 (Analog) (part no. 254 897-1)
A D 6 0	Cable with M16 female connector (6 pin) for connection type D60 (R-Series V Analog/G-Series V Digital) (part no. 254 989-1)
A S 0 0	Cable with 6 × terminal clamps for connection type cable outlet (R-Series V Analog/SSI) and connection type D60 (G-Series V Analog) (part no. 255 043-1)

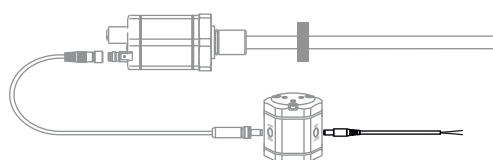
Plug-in power supply with plug adapters (AU, CCC, EU, UK, US)



Cable for insertion in existing sensor power supply with sensor mating connector and barrel connector



Barrel connector with pig-tail for connection to an existing power supply



DELIVERY



- TempoLink® smart assistant kit** Adapter cables to connect
- TempoLink® smart assistant
 - One of the four options for the power supply
 - One adapter cable to connect TempoLink® smart assistant to R- and G-Series V sensor
 - USB cable for optional connection of TempoLink® smart assistant to a computer
- TempoLink® smart assistant to sensors of R- and G-Series V can be ordered separately



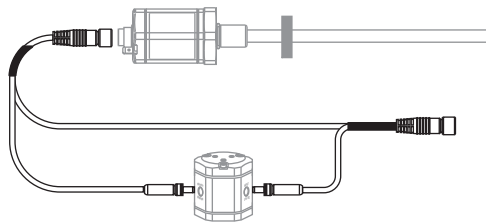
9.1 Adapter cables for connection of TempoLink® smart assistant to an R-Series V or a G-Series V sensor

Photo	Name & part number	Description	Series & output	
	Adapter cable for D56 M8 female connector (4 pin) – barrel Part no. 254 887-1	Material: PVC Cable length: 1.5 m	R-Series V	
			EtherCAT®	D56
			EtherNet/IP™	D56
			POWERLINK	D56
			PROFINET	D56
	Adapter cable for D34/D58 M12 female connector (5 pin/4 pin) – barrel Part no. 254 897-1	Material: PUR Cable length: 1.5 m	R-Series V	
			Analog	D34
			EtherCAT®	D58
			EtherNet/IP™	D58
			POWERLINK	D58
	Adapter cable for D60 M16 female connector (6 pin) – barrel Part no. 254 989-1	Material: PVC Cable length: 1.5 m	R-Series V	
			Analog	D60
			G-Series V	
Digital	D60			
	Adapter cable for D70 M16 female connector (7 pin) – barrel Part no. 254 990-1	Material: PVC Cable length: 1.5 m	R-Series V	
			SSI	D70
	Adapter cable for D84 M12 female connector (8 pin) – barrel Part no. 255 204-1	Material: PUR Cable length: 1.5 m	R-Series V	
			SSI	D84
	Adapter cable for cable output 6 x terminal clamps – barrel Part no. 255 043-1	Material: PVC Cable length: 1.5 m	R-Series V	
			Analog	Cable outlet
			SSI	Cable outlet
			EtherCAT®	MXX
			EtherNet/IP™	MXX
			POWERLINK	MXX
			PROFINET	MXX
			G-Series V	
			Analog	D60, cable outlet
Digital	Cable outlet			

9.2 Inline cables for SSI output

Photo	Name & part number	Description	Series & output	
	Inline cable for cable outlet (SSI) 6 × terminal clamps – pigtail with 2 barrel connectors Part no. 255 004	Material: PVC Cable length: 1.5 m	R-Series V	
			SSI	Cable outlet
	Inline cable for D70 M16 female connector (7 pin) – M16 connector male (7 pin) with 2 barrel connectors Part no. 254 994-1	Material: PVC Cable length: 1.5 m	R-Series V	
			SSI	D70

NOTICE



Inline cable

- The TempoLink® smart assistant can be used to read out R-Series V status information during operation.
- SSI combines power supply and data lines in one cable.
- Inline cable allows the TempoLink® smart assistant to be connected in parallel to the data transfer to the control.
So status information can be read during operation of the R-Series V SSI sensor while the TempoLink® smart assistant is connected.

10. TempoGate® smart assistant for R-Series V

YOUR SMART ASSISTENT

The TempoGate® smart assistant is an accessory for the R-Series V sensors family. It is installed in a control cabinet and provides additional status information of the sensors for monitoring and diagnostics of your plant during operation. In addition, the TempoGate® smart assistant supports the setup of the sensors in your application.

1	2	3	4	5	6	7
T	G		0	D		
a		b		d		

a	Type
T G	TempoGate® smart assistant kit
b	Power supply per channel at the connection module
C	Common power supply for all channels via connection module 1
I	Individual power supply for each channel
c	Options
0	No options
d	Number of digital channels for connection of R-Series V
D X X	D02...D24 (02...24 channels for R-Series V EtherCAT®, EtherNet/IP™, POWERLINK, PROFINET or SSI) only even number of digital channels possible

DELIVERY






TempoGate® smart assistant kit


- TempoGate® smart assistant gateway
- Depending on the selected configuration: one to four connection modules for 2...24 digital R-Series V sensors
- Power supply for gateway (3 pin connector)



10.1 Connection modules

Photo/ Drawing	Name & part number	Description	Series & output
	TempoGate® connection module for digital sensors with 2 channels Part no. 255058-1	Connection module for expanding the TempoGate® smart assistant for R-Series V EtherCAT®/EtherNet/IP™/POWERLINK/PROFINET/SSI. Note, that no more than four connection modules can be connected to one TempoGate® gateway.	R-Series V EtherCAT® EtherNet/IP™ POWERLINK PROFINET SSI
	TempoGate® connection module for digital sensors with 4 channels Part no. 255058-2	Connection module for expanding the TempoGate® smart assistant for R-Series V EtherCAT®/EtherNet/IP™/POWERLINK/PROFINET/SSI. Note, that no more than four connection modules can be connected to one TempoGate® gateway.	R-Series V EtherCAT® EtherNet/IP™ POWERLINK PROFINET SSI
	TempoGate® connection module for digital sensors with 6 channels Part no. 255058-3	Connection module for expanding the TempoGate® smart assistant for R-Series V EtherCAT®/EtherNet/IP™/POWERLINK/PROFINET/SSI. Note, that no more than four connection modules can be connected to one TempoGate® gateway.	R-Series V EtherCAT® EtherNet/IP™ POWERLINK PROFINET SSI

10.2 Recovery Medium

Photo	Name & part number	Description
	TempoGate® recovery medium Part no. 531155-1	USB stick with a signed image for software recovery of the TempoGate® gateway

UNITED STATES
Temposonics, LLC
Americas & APAC Region
3001 Sheldon Drive
Cary, N.C. 27513
Phone: +1 919 677-0100
E-mail: info.us@temposonics.com

GERMANY
Temposonics
GmbH & Co. KG
EMEA Region & India
Auf dem Schüffel 9
58513 Lüdenscheid
Phone: +49 2351 9587-0
E-mail: info.de@temposonics.com

ITALY
Branch Office
Phone: +39 030 988 3819
E-mail: info.it@temposonics.com

FRANCE
Branch Office
Phone: +33 6 14 060 728
E-mail: info.fr@temposonics.com

UK
Branch Office
Phone: +44 79 21 83 05 86
E-mail: info.uk@temposonics.com

SCANDINAVIA
Branch Office
Phone: +46 70 29 91 281
E-mail: info.sca@temposonics.com

CHINA
Branch Office
Phone: +86 21 3405 7850
E-mail: info.cn@temposonics.com

JAPAN
Branch Office
Phone: +81 3 6416 1063
E-mail: info.jp@temposonics.com

Document Part Number:
551444 Revision K (EN) 04/2026

temposonics.com