



Temposonics

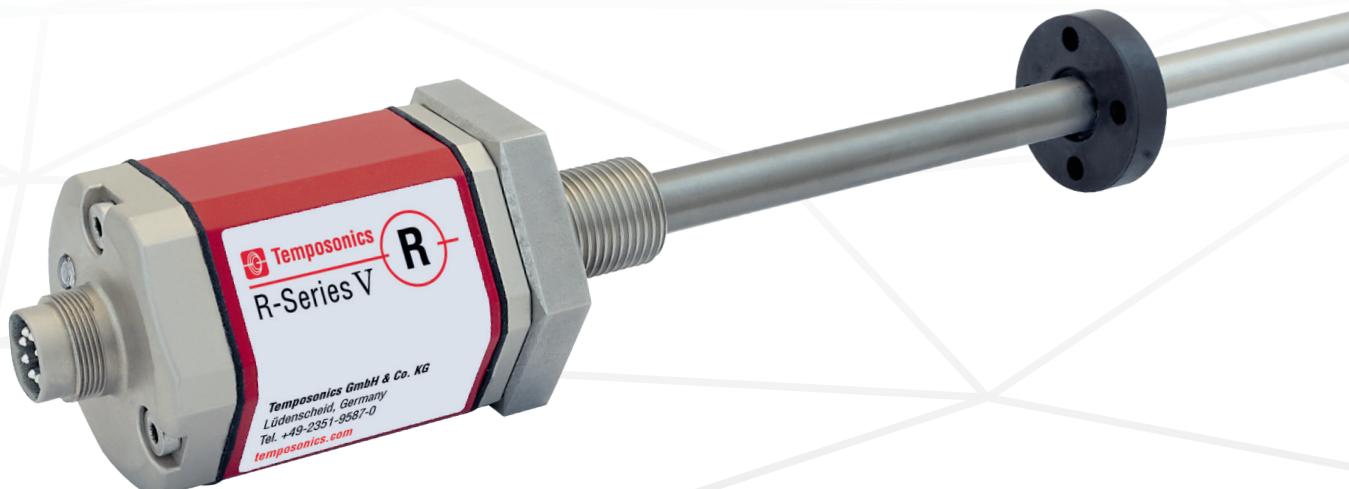
AN AMPHENOL COMPANY

Data Sheet

R-Series V RH5 Analog Magnetostrictive Linear Position Sensors

NEW!
Also with flexible
sensing element
for easy replacement

- Output of position and speed/velocity
- Dual magnet position measurement
- Field adjustments and diagnostics using the TempoLink® smart assistant



THE NEW V GENERATION

MEASURING TECHNOLOGY

The absolute, linear position sensors provided by Tempsonics rely on the company's proprietary magnetostrictive technology, which can determine position with a high level of precision and robustness. Each Tempsonics® position sensor consists of a ferromagnetic waveguide, a position magnet, a strain pulse converter and supporting electronics. The magnet, connected to the object in motion in the application, generates a magnetic field at its location on the waveguide. A short current pulse is applied to the waveguide. This creates a momentary radial magnetic field and torsional strain on the waveguide. The momentary interaction of the magnetic fields releases a torsional strain pulse that propagates the length of the waveguide. When the ultrasonic wave reaches the beginning of the waveguide it is converted into an electrical signal. Since the speed of the ultrasonic wave in the waveguide is precisely known, the time required to receive the return signal can be converted into a linear position measurement with both high accuracy and repeatability.


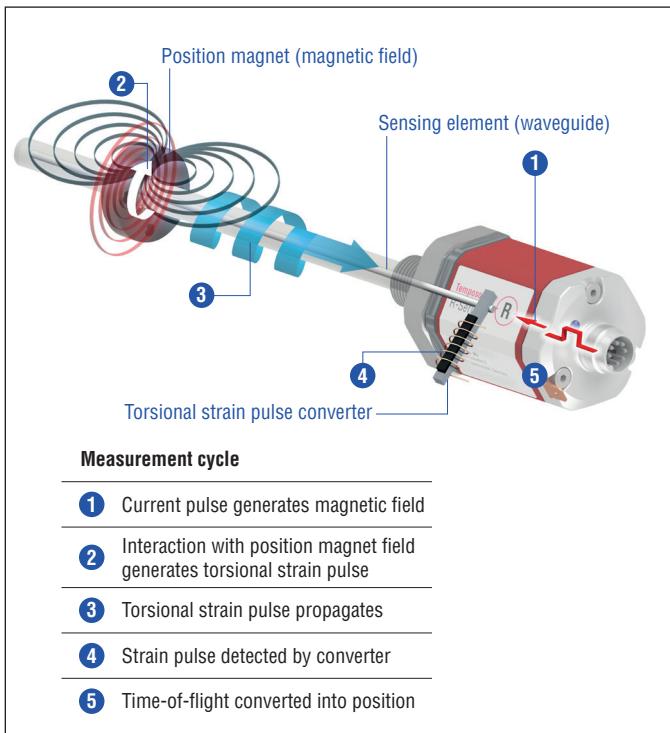


Fig. 1: Time-of-flight based magnetostrictive position sensing principle


R-SERIES V RH5 Analog

The Tempsonics® R-Series V brings very powerful sensor performance to meet the many demands of your application. The main advantages of the rod version RH5 with Analog output (current/voltage) are:




High shock and vibration resistance

The R-Series V is the long term solution for harsh environments that have high levels of shock and vibration.




Internal resolution 0.1 µm

The sensor works with an internal resolution of 0.1 µm to detect and report smallest position changes.



Dual output channel

The sensor is available with single output channel or with dual output channels.




Multiple output options

The following values can be output via the second output:

- Speed/velocity of the first magnet
- Reversed position of the first magnet
- Position of the second magnet
- Temperature in the sensor electronics housing

In addition the R-Series V Analog scores with the following features:



2 positions simultaneously

The R-Series V Analog can detect and report the position of up to 2 magnets simultaneously.



R-Series V Analog

With the R-Series V Analog you can configure the Analog output (current/voltage) for your application and also adjust it on site with the smart assistant.

All settings under control with the smart assistant for the R-Series V
The TempoLink® smart assistant supports you in setup and diagnostics of the R-Series V. For more information of the assistant please see the data sheet:

- TempoLink® smart assistant
(Document part number: [552070](#))



RH5 WITH RIGID OR FLEXIBLE SENSING ELEMENT – YOU DECIDE

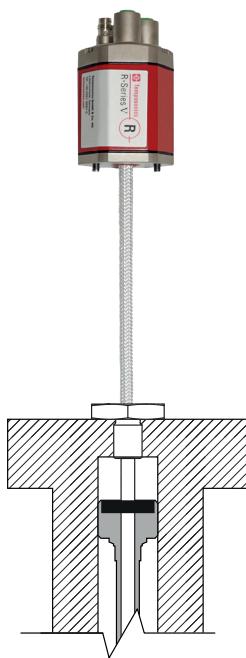
With the RH5, you can replace the base unit when the sensor is installed in the cylinder without opening the hydraulic circuit. This is possible as the flange with the pressure tube remains in the cylinder. You decide whether the base unit of the RH5 has a rigid or a flexible sensing element:

- RH5 with rigid sensor element: RH5-B/J/M/S/T-A/B/M/V
- RH5 with flexible sensing element: RH5-B/M/S/T-F


The advantages of the rod sensor with flexible sensing element RH5-B/M/S/T-F:

- Only a small amount of space is required when replacing the sensor as the sensing element can be bent
- It can be used as a replacement for an RH5 sensor with a rigid sensing element

Example: RH5-B/J/M/S/T-A/B/M/V
(rigid sensing element)



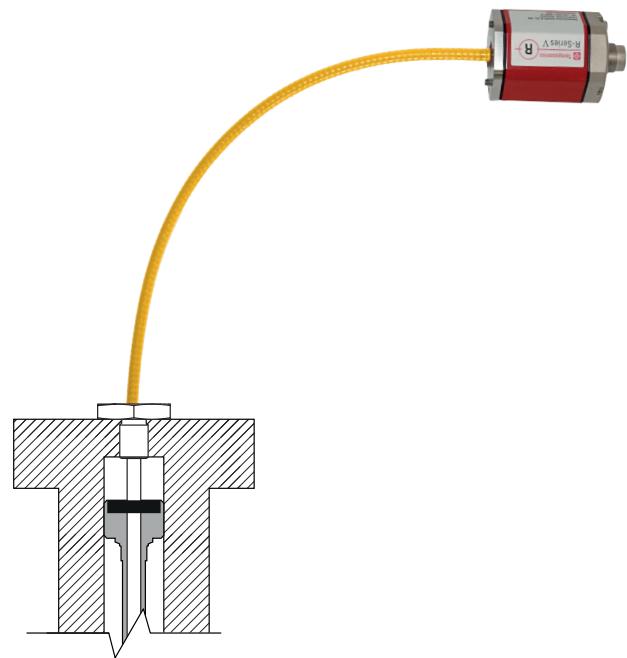Example: RH5-B/M/S/T-F
(flexible sensing element)



TECHNICAL DATA

Output												
Analog	Voltage: 0...10 / 10...0 / -10...+10 / +10...-10 VDC (min. controller load > 5 kΩ) Current: 4(0)...20/20...4(0) mA (min./max. load 0/500 Ω)											
Measured output variables	Position for one or two position magnets Position + speed (without direction) or velocity (with direction) for one position magnet Position for one position magnet + temperature inside the sensor electronics housing											
Measurement parameters												
Position measurement												
Null/Span adjustment	100 % of electrical stroke											
Resolution	16 bit (internal resolution 0.1 μm)											
Update time	Stroke length	≤ 200 mm	≤ 350 mm	≤ 1200 mm	≤ 2400 mm	≤ 4800 mm						
	Update time	0.25 ms	0.333 ms	0.5 ms	1.0 ms	2.0 ms						
						≤ 7620 mm						
Linearity deviation ¹	< ±0.01 % F.S. (minimum ±50 μm)											
Repeatability	< ±0.001 % F.S. (minimum ±1 μm)											
Hysteresis	< 4 μm typical											
Temperature coefficient	< 30 ppm/K typical											
Speed/velocity measurement												
Range	0.01...10 m/s or 1...400 in./s											
Deviation	≤ 0.05 %											
Resolution	16 bit (minimum 0.01 mm/s)											
Operating conditions												
Operating temperature	-40...+85 °C (-40...+185 °F)											
Humidity	90 % relative humidity, no condensation											
Ingress protection	IP67 (connectors correctly fitted)/IP68 (3 m/3 d) for straight cable outlet/IP68 (3 m/3 d) & IP69 for angled cable outlet											
Shock test	150 g/11 ms, IEC standard 60068-2-27											
Vibration test	30 g/10...2000 Hz, IEC standard 60068-2-6 (excluding resonant frequencies)/ RH5-J: 15 g/10...2000 Hz, IEC standard 60068-2-6 (excluding resonant frequencies)											
EMC test	Electromagnetic emission according to EN 61000-6-3 Electromagnetic immunity according to EN 61000-6-2 The RH5 sensors fulfill the requirements of the EMC directives 2014/30/EU, UKSI 2016 No. 1091 and TR CU 020/2011											
Operating pressure	350 bar (5,076 psi)/700 bar (10,153 psi) peak (at 10 × 1 min) for sensor rod/RH5-J: 800 bar (11,603 psi)											
Magnet movement velocity	Any											
Design/Material												
Sensor electronics housing	Aluminum (painted), zinc die cast											
Sensor flange	Stainless steel 1.4305 (AISI 303)											
Sensor rod	Stainless steel 1.4306 (AISI 304L)/RH5-J: Stainless steel 1.4301 (AISI 304)											
RoHS declaration	The used materials are compliant with the requirements of EU Directive 2011/65/EU and EU Regulation 2015/863 as well as UKSI 2022 No. 622 with amendments											
Stroke length	25...7620 mm (1...300 in.)/RH5-J: 25...5900 mm (1...232 in.)											
Mechanical mounting												
Mounting position	Any											
Mounting instruction	Please consult the technical drawings on page 6 , page 7 and the operation manual (document part number: 552063)											

Technical data “Electrical connection” on [page 5](#)


1/ With position magnet # 251 416-2

Electrical connection


Connection type	1 × M16 male connector (6 pin), 1 × M12 male connector (5 pin) or cable outlet
Operating voltage	+12...30 VDC ±20 % (9.6...36 VDC); the RH5 sensors must be power supplied via an external Class 2 power source in accordance with the UL approval
Power consumption	< 3.25 W
Dielectric strength	500 VDC (DC ground to machine ground)
Polarity protection	Up to -36 VDC
Overvoltage protection	Up to 36 VDC

TECHNICAL DRAWING

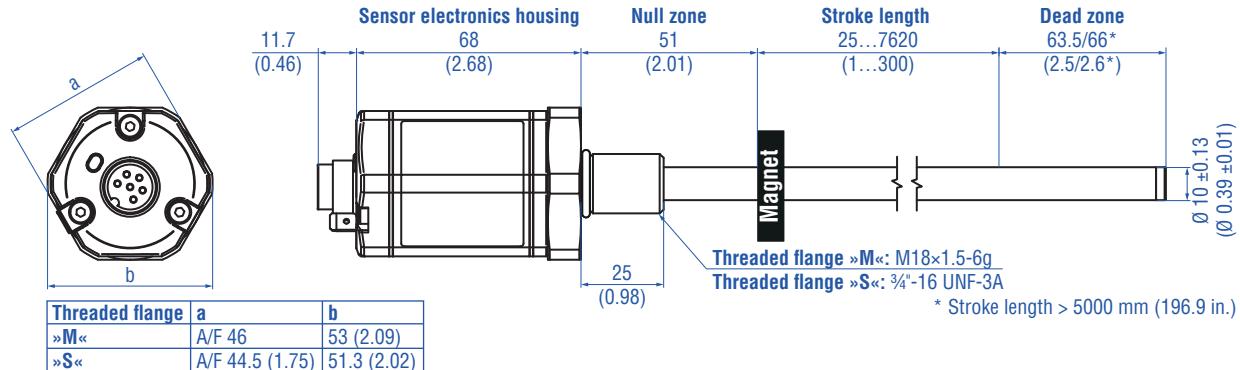
RH5-M/S-A/V – RH5 with threaded flange M18x1.5-6g or 3/4"-16 UNF-3A, example: Connection type D60 (connector outlet)




RH5-T-A/V – RH5 with threaded flange 3/4"-16 UNF-3A with raised-face, example: Connection type EXX/GXX/LXX/UXX (angled cable outlet)

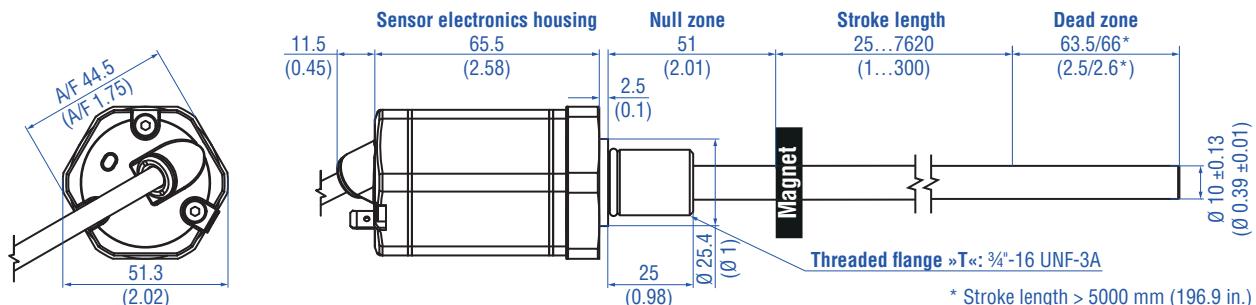


RH5-T-A/V – RH5 with threaded flange 3/4"-16 UNF-3A with raised-face, example: Connection type HXX/RXX/TXX (straight cable outlet)

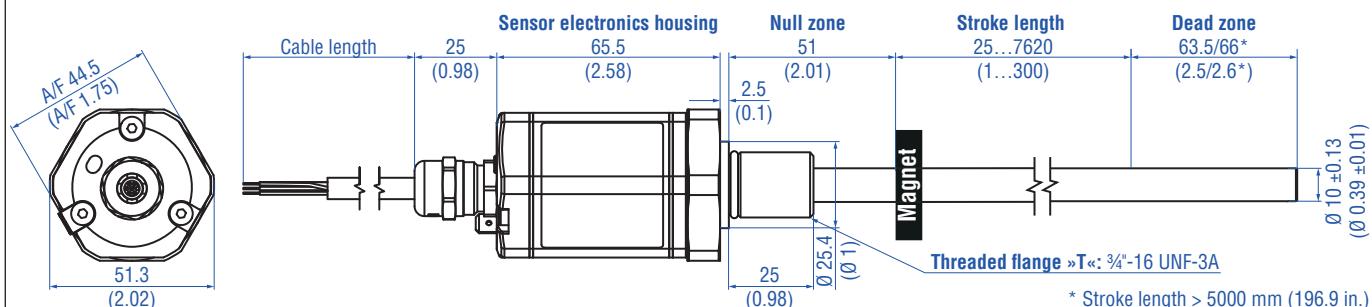

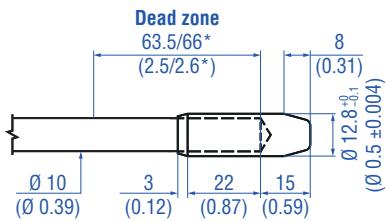Mechanical option »B«: Bushing on rod end for threaded flange M18x1.5-6g or 3/4"-16 UNF-3A



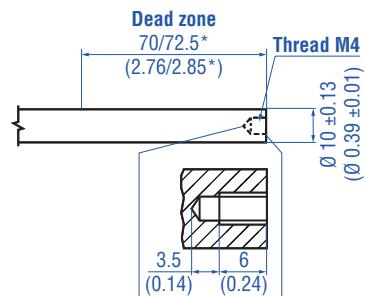Mechanical option »M«: Thread M4 at rod end for threaded flange M18x1.5-6g or 3/4"-16 UNF-3A



Controlling design dimensions are in millimeters and measurements in () are in inches

Fig. 2: Tempsonics® RH5 with ring magnet, part 1

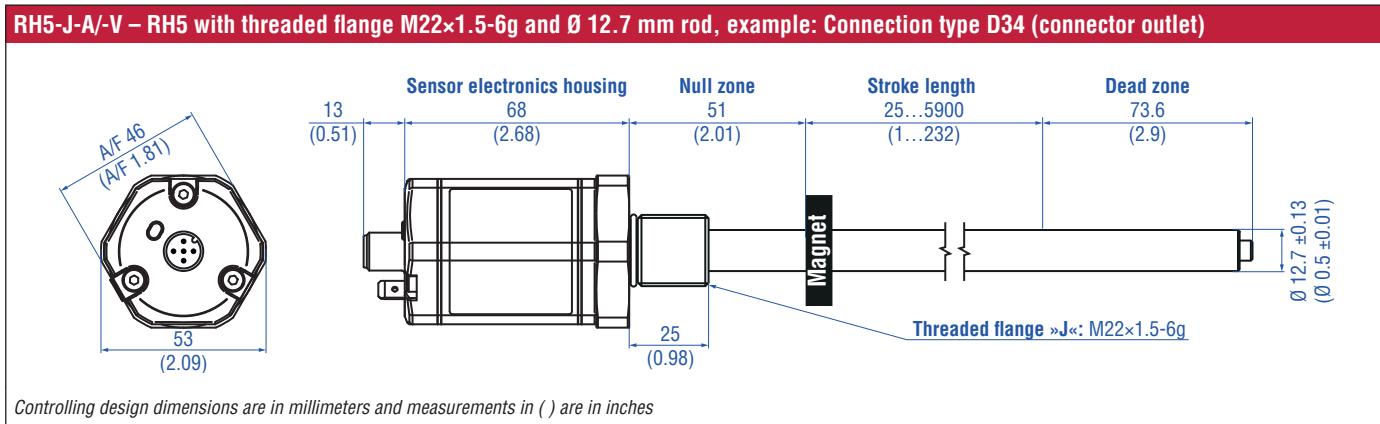
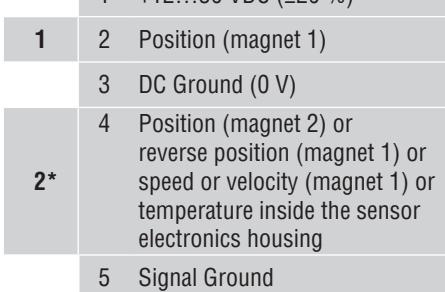



Fig. 3: Tempsonics® RH5 with ring magnet, part 2

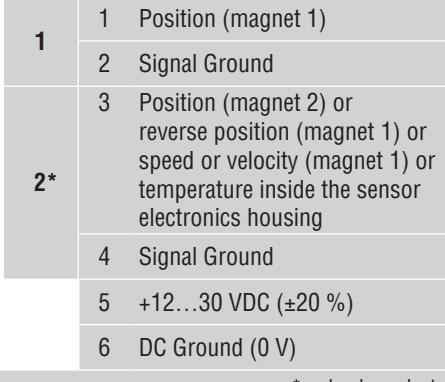CONNECTOR WIRING

D34			
Signal + power supply			
M12 male connector	Output	Pin	Function
		1	+12...30 VDC ($\pm 20\%$)
		2	Position (magnet 1)
		3	DC Ground (0 V)
		2*	Position (magnet 2) or reverse position (magnet 1) or speed or velocity (magnet 1) or temperature inside the sensor electronics housing
		5	Signal Ground


* order dependent

Fig. 4: Connector wiring D34

D60			
Signal + power supply			
M16 male connector	Output	Pin	Function
		1	Position (magnet 1)
		2	Signal Ground
		2*	Position (magnet 2) or reverse position (magnet 1) or speed or velocity (magnet 1) or temperature inside the sensor electronics housing
		4	Signal Ground
		5	+12...30 VDC ($\pm 20\%$)
		6	DC Ground (0 V)

* order dependent

Fig. 5: Connector wiring D60

HXX or LXX/RXX or EXX/TXX or GXX/UXX			
Signal + power supply			
Cable	Output	Color	Function
	1	GY	Position (magnet 1)
		PK	Signal Ground
	2*	YE	Position (magnet 2) or reverse position (magnet 1) or speed or velocity (magnet 1) or temperature inside the sensor electronics housing
		GN	Signal Ground
		BN	+12...30 VDC ($\pm 20\%$)
		WH	DC Ground (0 V)

* order dependent

For cable type TXX, the extra red & blue wires are not used.

Fig. 6: Connector wiring cable outlet

NOTICE





For sensors with current output (order code section **h** Output **A** Current), the output 1 (position (magnet 1)) must be connected in any case.

Straight cable outlet	Cable type	Angled cable outlet
H  X  X 	Part no. 530 052 PUR →	L  X  X  Part no. 530 052
R  X  X 	Part no. 530 032 PVC →	E  X  X  Part no. 530 032
T  X  X 	Part no. 530 112 FEP →	G  X  X  Part no. 530 157





Fig. 7: Cable types assignment

FREQUENTLY ORDERED ACCESSORIES – Additional options available in our [Accessories Catalog](#)  551444

Position magnets





			
U-magnet OD33 Part no. 251 416-2	Ring magnet OD33 Part no. 201 542-2	Ring magnet OD25.4 Part no. 400 533	Ring magnet Part no. 402 316
Material: PA ferrite GF20 Weight: Approx. 11 g Surface pressure: Max. 40 N/mm ² Fastening torque for M4 screws: 1 Nm Operating temperature: -40...+105 °C (-40...+221 °F)	Material: PA ferrite GF20 Weight: Approx. 14 g Surface pressure: Max. 40 N/mm ² Fastening torque for M4 screws: 1 Nm Operating temperature: -40...+105 °C (-40...+221 °F)	Material: PA ferrite Weight: Approx. 10 g Surface pressure: Max. 40 N/mm ² Operating temperature: -40...+105 °C (-40...+221 °F)	Material: PA ferrite coated Weight: Approx. 13 g Surface pressure: Max. 20 N/mm ² Operating temperature: -40...+100 °C (-40...+212 °F)

Position magnet





			
Block magnet L Part no. 403 448	Magnet spacer Part no. 400 633	O-ring for threaded flange M18×1.5-6g Part no. 401 133	O-ring for threaded flange 3/4"-16 UNF-3A Part no. 560 315
Material: Plastic carrier with neodymium magnet Weight: Approx. 20 g Fastening torque for M4 screws: 1 Nm Operating temperature: -40...+75 °C (-40...+167 °F)	Material: Aluminum Weight: Approx. 5 g Surface pressure: Max. 20 N/mm ² Fastening torque for M4 screws: 1 Nm	Material: Fluoroelastomer Durometer: 75 ±5 Shore A Operating temperature: -40...+204 °C (-40...+400 °F)	Material: Fluoroelastomer Durometer: 75 ±5 Shore A Operating temperature: -40...+204 °C (-40...+400 °F)

This magnet may influence the sensor performance specifications for some applications.



O-ring

			
O-ring for threaded flange M22×1.5-6g Part no. 561 337	Hex jam nut M18×1.5-6g Part no. 500 018	Hex jam nut 3/4"-16 UNF-3A Part no. 500 015	Fixing clip Part no. 561 481
Material: FPM Durometer: 75 Shore A Operating temperature: -20...+200 °C (-6...+392 °F)	Material: Steel, zinc plated	Material: Steel, zinc plated	Application: Used to secure sensor rods (Ø 10 mm (Ø 0.39 in.)) when using an U-magnet or block magnet Material: Brass, non-magnetic

Cable connectors*

			
M16 female connector (6 pin), straight Part no. 370 423	M16 female connector (6 pin), angled Part no. 370 460	M12 A-coded female connector (4 pin/5 pin), straight Part no. 370 677	M12 A-coded female connector (5 pin), angled Part no. 370 678
Material: Zinc nickel plated Termination: Solder Cable Ø: 6...8 mm (0.24...0.31 in.) Operating temperature: -40...+100 °C (-40...+212 °F) Ingress protection: IP65/IP67 (correctly fitted) Fastening torque: 0.6 Nm	Material: Zinc nickel plated Termination: Solder Cable Ø: 6...8 mm (0.24...0.31 in.) Wire: 0.75 mm ² (20 AWG) Operating temperature: -40...+95 °C (-40...+203 °F) Ingress protection: IP67 (correctly fitted) Fastening torque: 0.6 Nm	Material: GD-Zn, Ni Termination: Screw Contact insert: CuZn Cable Ø: 4...8 mm (0.16...0.31 in.) Wire: max. 1.5 mm ² (16 AWG) Operating temperature: -30...+85 °C (-22...+185 °F) Ingress protection: IP67 (correctly fitted) Fastening torque: 0.6 Nm	Material: GD-Zn, Ni Termination: Screw Contact insert: CuZn Cable Ø: 5...8 mm (0.2...0.31 in.) Wire: max 0.75 mm ² (18 AWG) Operating temperature: -25...+85 °C (-13...+185 °F) Ingress protection: IP67 (correctly fitted) Fastening torque: 0.4 Nm


Cables

			
PVC cable Part no. 530 032	PUR cable Part no. 530 052	FEP cable Part no. 530 112	FEP cable Part no. 530 157
Material: PVC jacket; gray Features: Twisted pair, shielded, flexible Cable Ø: 6 mm (0.23 in.) Cross section: 3 x 2 x 0.14 mm ² Bending radius: 10 x D (fixed installation) Operating temperature: -40...+105 °C (-40...+221 °F)	Material: PUR jacket; orange Features: Twisted pair, shielded, highly flexible, halogen free, suitable for drag chains, mostly oil & flame resistant Cable Ø: 6.4 mm (0.25 in.) Cross section: 3 x 2 x 0.25 mm ² Bending radius: 5 x D (fixed installation) Operating temperature: -20...+80 °C (-4...+176 °F)	Material: FEP jacket; black Features: Twisted pair, shielded, flexible, high thermal resistance, mostly oil & acid resistant Cable Ø: 7.6 mm (0.3 in.) Cross section: 4 x 2 x 0.25 mm ² Bending radius: 8 – 10 x D (fixed installation) Operating temperature: -100...+180 °C (-148...+356 °F)	Material: FEP jacket; black Features: Twisted pair, shielded Cable Ø: 6.7 mm (0.26 in.) Cross section: 3 x 2 x 0.14 mm ² Operating temperature: -40...+180 °C (-40...+356 °F)

*/ Follow the manufacturer's mounting instructions

Color of connectors and cable jacket may change. Color codes for the individual wires and technical properties remain unchanged.

Controlling design dimensions are in millimeters and measurements in () are in inches

Cable	Cable sets	
		
Silicone cable Part no. 530 176		
Material: Silicone jacket; black Features: Twisted pair, shielded Cable Ø: 6.3 mm (0.25 in.) Cross section: 3 x 2 x 0.14 mm ² Bending radius: 7 x D (fixed installation) Operating temperature: -50...+150 °C (-58...+302 °F)	Cable with M12 A-coded female connector (5 pin), straight – pigtail Part no. 370 673	Cable with M12 A-coded female connector (5 pin), angled – pigtail Part no. 370 675
Material: PUR jacket; black Feature: Shielded Cable length: 5 m (16.4 ft) Ingress protection: IP67 (correctly fitted) Operating temperature: -25...+80 °C (-13...+176 °F)	Material: PUR jacket; black Feature: Shielded Cable length: 5 m (16.4 ft) Ingress protection: IP67 (correctly fitted) Operating temperature: -25...+80 °C (-13...+176 °F)	Material: PUR jacket; black Feature: Shielded Cable length: 5 m (16.4 ft) Ingress protection: IP67 (correctly fitted) Operating temperature: -25...+80 °C (-13...+176 °F)
Programming tools		
		
Hand programmer for analog output Part no. 253 124	Cabinet programmer for analog output Part no. 253 408	TempoLink® kit for Tempsonics® R-Series V Part no. TL-1-0-AD60 (for D60) Part no. TL-1-0-AS00 (for cable outlet) Part no. TL-1-0-AD34 (for D34)
Easy teach-in-setups of stroke length and direction on desired zero/span positions. For sensors with 1 magnet.	Features snap-in mounting on standard DIN rail (35 mm). This programmer can be permanently mounted in a control cabinet and includes a program/run switch. For sensors with 1 magnet.	<ul style="list-style-type: none"> • Connect wirelessly via Wi-Fi enabled device or via USB with the diagnostic tool • Simple connectivity to the sensor via 24 VDC power line (permissible cable length: 30 m) • User friendly interface for mobile devices and desktop computers • See data sheet "TempoLink® smart assistant" (document part no.: 552070) for further information

Controlling design dimensions are in millimeters and measurements in () are in inches
Color of connectors and cable jacket may change. Color codes for the individual wires and technical properties remain unchanged.

Extension cables M12



PVC cable with M12 female connector (6 pin), straight - pigtail



PUR cable with M12 female connector (6 pin), straight - pigtail



FEP cable with M12 female connector (6 pin), straight - pigtail

PVC cable (part no. 530 032) with M12 female connector, straight (part no. 370 677)

Order code:
K2-A-370677-xxxxyy-530032-0
(where xxxx = cable length and yy = unit in centimeters "CM" or feet "FT")

PUR cable (part no. 530 052) with M12 female connector, straight (part no. 370 677)

Order code:
K2-A-370677-xxxxyy-530052-0
(where xxxx = cable length and yy = unit in centimeters "CM" or feet "FT")

FEP cable (part no. 530 112) with M12 female connector, straight (part no. 370 677)

Order code:
K2-A-370677-xxxxyy-530112-0
(where xxxx = cable length and yy = unit in centimeters "CM" or feet "FT")

Extension cables M16



PVC cable with M16 female connector (6 pin), straight - pigtail



PUR cable with M16 female connector (6 pin), straight - pigtail



FEP cable with M16 female connector (6 pin), straight - pigtail

PVC cable (part no. 530 032) with M16 female connector, straight (part no. 370 423)

Order code:
K2-A-370423-xxxxyy-530032-0
(where xxxx = cable length and yy = unit in centimeters "CM" or feet "FT")

PUR cable (part no. 530 052) with M16 female connector, straight (part no. 370 423)

Order code:
K2-A-370423-xxxxyy-530052-0
(where xxxx = cable length and yy = unit in centimeters "CM" or feet "FT")

FEP cable (part no. 530 112) with M16 female connector, straight (part no. 370 423)

Order code:
K2-A-370423-xxxxyy-530112-0
(where xxxx = cable length and yy = unit in centimeters "CM" or feet "FT")

Notice for extension cables M12/M16

Standard cable lengths		
Meters	Feet	Code
1.5	5.0	0150
2.0	6.6	0200
4.6	15.0	0460
5.0	16.4	0500
7.6	25.0	0760
10.0	32.8	1000
15.2	50.0	1520

For additional extension cables reference the accessories catalog for industrial sensors (document part no.: [551444](#)).

Color of connectors and cable jacket may change. Color codes for the individual wires and technical properties remain unchanged.

ORDER CODE

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
R	H	5												1								
a	b	c			d		e		f		g	h	i	j	k							l

optional

a	Sensor model
R	H 5 Rod

b	Design
B	Base unit (only for replacement)
J	Threaded flange M22×1.5-6g (rod Ø 12.7 mm), stroke length: 25...5900 mm (1...232 in.)
M	Threaded flange M18×1.5-6g (standard)
S	Threaded flange 3/4"-16 UNF-3A (standard)
T	Threaded flange 3/4"-16 UNF-3A (with raised-face)

c	Mechanical options
A	Standard
B	Bushing on rod end (only for design »M«, »S« & »T«)
F	Flexible sensing element (only for design »B«, »M«, »S« & »T«)
M	Thread M4 at rod end (only for design »M«, »S« & »T«)
V	Fluorelastomer seals for the sensor electronics housing

d	Stroke length
X	X X X X M 0025...7620 mm
Standard stroke length (mm)	Ordering steps
25... 500 mm	5 mm
500... 750 mm	10 mm
750...1000 mm	25 mm
1000...2500 mm	50 mm
2500...5000 mm	100 mm
5000...7620 mm	250 mm
X X X X X U	001.0...300.0 in.
Standard stroke length (in.)	Ordering steps
1... 20 in.	0.2 in.
20... 30 in.	0.4 in.
30... 40 in.	1.0 in.
40...100 in.	2.0 in.
100...200 in.	4.0 in.
200...300 in.	10.0 in.

Non-standard stroke lengths are available;
must be encoded in 5 mm/0.1 in. increments.

e	Number of magnets
0	X 01...02 Position(s) (1...2 magnet(s))

f	Connection type
Connector	

D	3	4
D	6	0

M12 male connector (5 pin)
M16 male connector (6 pin)

Angled cable outlet

E	X	X
E	X	X

XX m/ft. PVC cable (part no. 530 032)
E01...E30 (1...30 m/3...99 ft.)
See "Frequently ordered accessories" for cable
specifications

G	X	X
G	X	X

XX m/ft. FEP cable (part no. 530 157)
G01...G30 (1...30 m/3...99 ft.)
See "Frequently ordered accessories" for cable
specifications

L	X	X
L	X	X

XX m/ft. PUR cable (part no. 530 052)
L01...L30 (1...30 m/3...99 ft.)
(Note the temperature range of the cable!)
See "Frequently ordered accessories" for cable
specifications

U	X	X
U	X	X

XX m/ft. Silicone cable (part no. 530 176)
U01...U30 (1...30 m/3...99 ft.)
See "Frequently ordered accessories" for cable
specifications

H	X	X
H	X	X

XX m/ft. PUR cable (part no. 530 052)
H01...H30 (1...30 m/3...99 ft.)
(Note the temperature range of the cable!)
See "Frequently ordered accessories" for cable
specifications

R	X	X
R	X	X

XX m/ft. PVC cable (part no. 530 032)
R01...R30 (1...30 m/3...99 ft.)
See "Frequently ordered accessories" for cable
specifications

T	X	X
T	X	X

XX m/ft. FEP cable (part no. 530 112)
T01...T30 (1...30 m/3...99 ft.)
See "Frequently ordered accessories" for cable
specifications

Encode in meters if using metric stroke length.
Encode in feet if using US customary stroke length.

g	System
1	Standard

h	Output
A	Current
V	Voltage

i	Function
1	Position (1 or 2 magnets/outputs)
2	Position and speed (1 magnet and 2 outputs) Specify the maximum speed value in section i
3	Position and velocity (1 magnet and 2 outputs) Specify the maximum velocity value in section i
4	Position and reverse position (1 magnet and 2 outputs)
5	Position and temperature inside the sensor electronics housing (1 magnet and 2 outputs)
6	Differential (2 magnets and 1 output)

j	Options
0	Standard
3	Over range output mode

k	Output range
0	0...10 VDC or 4...20 mA
1	10...0 VDC or 20...4 mA
2	-10...+10 VDC or 0...20 mA
3	+10...-10 VDC or 20...0 mA
V	0...10 VDC for position, -10...+10 VDC for velocity

l	Max. speed or velocity value
(optional: use when i "Function" is 2 or 3)	
<input type="checkbox"/>	For metric stroke lengths encode speed or velocity in m/s for the values 0.01 to 9.99 m/s (001...999)
l	Max. speed or velocity value
(optional: use when i "Function" is 2 or 3)	
<input type="checkbox"/>	For metric stroke lengths encode speed or velocity in m/s for the values 0.01 to 9.99 m/s (001...999)
<input type="checkbox"/>	For US customary stroke lengths encode speed or velocity in inches/s for the values 1 to 400 in./s (001...400)

To get a speed or velocity output of 0.025 m/s or 10 m/s for the R-Series V Analog, enter code (00E) for 0.025 m/s or (A00) for 10.0 m/s in the order code.

DELIVERY



RH5-B:

- Base unit (without flange & rod assembly)
- 3 x socket screws M4x59

RH5-J/-M/-S/-T:

- Sensor
- O-ring

Accessories have to be ordered separately.

Manuals, Software & 3D Models available at:

www.tempsonics.com

NOTICE
<ul style="list-style-type: none"> Specify the number of magnets for your application and order the magnets separately. The number of magnets is limited by the stroke length. The minimum allowed distance between magnets (i.e. front face of one to the front face of the next one) is 75 mm (3 in.). Use magnets of the same type for differential/multi-position measurement.

GLOSSARY

A

Analog output

For a sensor with analog output, the measured value is output as an analog voltage signal or current signal.

D

Differential

For differential measurement, the distance between the two position magnets is output as a value.
(→ multi-position measurement)

M

Max. speed or velocity value

For speed or velocity, the output value generated is scaled based on the maximum speed or velocity value indicated in the order code.

Measuring direction

- Forward: Values increasing from sensor electronics housing to rod end/profile end
- Reverse: Values decreasing from sensor electronics housing to rod end/profile end

Multi-position measurement

During the measurement cycle, the positions of every magnet on the sensor are simultaneously reported. The velocity or speed is continuously calculated based on these changing position values as the magnets are moved.

O

Over range output mode

When enabled this mode allows the position output values to continue to increase or decrease when the magnet travels beyond the active stroke range.

R

Resolution

The sensor precisely measures time to provide the position measurement. For the analog output the measured time value is converted into an analog voltage signal or current signal using a high-performance **Digital to Analog Converter (DAC)** having 16 bits of resolution.

S

Speed

The output value for speed indicates how fast the position magnet is being moved, independent of the measuring direction. (→ Velocity)

T

Temperature inside the sensor electronics housing

The temperature inside the sensor electronics housing is reported as an analog voltage signal or current signal. For each output range, the 0 % output value has the factory default setpoint at -40 °C, and the 100 % output value has the default setpoint at +100 °C.

Note: A dedicated temperature chip is used for the output signal and its values may vary from those reported on the **TempoLink®** application screen.

V

Velocity

The output value for velocity indicates how fast the position magnet is being moved, and in which direction. (→ Speed)



Temposonics

AN AMPHENOL COMPANY

UNITED STATES 3001 Sheldon Drive
Temposonics, LLC Cary, N.C. 27513
Americas & APAC Region Phone: +1 919 677-0100
E-mail: info.us@temposonics.com

GERMANY Auf dem Schüffel 9
Temposonics 58513 Lüdenscheid
GmbH & Co. KG Phone: +49 2351 9587-0
EMEA Region & India E-mail: info.de@temposonics.com

ITALY Phone: +39 030 988 3819
Branch Office E-mail: info.it@temposonics.com

FRANCE Phone: +33 6 14 060 728
Branch Office E-mail: info.fr@temposonics.com

UK Phone: +44 79 21 83 05 86
Branch Office E-mail: info.uk@temposonics.com

SCANDINAVIA Phone: +46 70 29 91 281
Branch Office E-mail: info.sca@temposonics.com

CHINA Phone: +86 21 3405 7850
Branch Office E-mail: info.cn@temposonics.com

JAPAN Phone: +81 3 6416 1063
Branch Office E-mail: info.jp@temposonics.com

Document Part Number:
552061 Rev D (EN) 02/2026



temposonics.com

© 2026 Temposonics, LLC – all rights reserved. Temposonics, LLC and Temposonics GmbH & Co. KG are subsidiaries of Amphenol Corporation. Except for any third party marks for which attribution is provided herein, the company names and product names used in this document may be the registered trademarks or unregistered trademarks of Temposonics, LLC or Temposonics GmbH & Co. KG. Detailed trademark ownership information is available at www.temposonics.com/trademarkownership.